

# RediPower Drills



## TOOL SELECTION

	GRIP	REVERSIBLE	KEYLESS CHUCK	GENERAL DUTY	HEAVY DUTY
1064	Slimline pistol			✓	
1454	Slimline pistol			✓	
1664	Slimline pistol	✓		✓	
1264	Pistol				✓
1274	Pistol		✓		✓
1404	Pistol				✓

## REDIPOWER – DRILLS

SPECIFICATION

PICTURE REF	MODEL	PART NO	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD		AIR CONSUMPTION		NOISE LEVEL	VIBRATION	OVERALL LENGTH		NET WEIGHT	
				hp	KW	in.	mm			cfm	l/s <sup>1</sup>			dB(A)	ms <sup>-2</sup>	in.	mm
A	1064	1064	2500	0.30	0.23	3/8"	10	3/8"-24	19.7	9.3	83	<2.5	8.9	225	1.5	0.7	
A	1454	1454	4300	0.30	0.23	3/8"	10	3/8"-24	19.7	9.3	83	<2.5	8.9	225	1.5	0.7	
B	1664	1664	2000	0.26	0.19	3/8"	10	3/8"-24	19.7	9.3	83	<2.5	8.9	225	1.5	0.7	
C	1264	1264	2900	0.38	0.28	3/8"	10	3/8"-24	19.7	9.3	78	<2.5	6.9	175	2.0	0.9	
D	1274	1274	2900	0.38	0.28	3/8"	10	3/8"-24	19.7	9.3	78	<2.5	6.9	175	2.0	0.9	
E	1404	1404	1400	0.52	0.39	1/2"	13	3/8"-24	22.0	10.4	78	<2.5	9.6	243	2.9	1.3	

# RediPower Drills

A



C




B




D



F



E

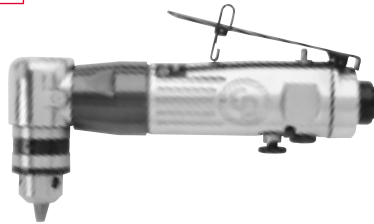

## TOOL SELECTION

	GRIP	REVERSIBLE	GENERAL DUTY	HEAVY DUTY
CP785	Pistol		✓	
CP785H	Pistol		✓	
CP789HR	Pistol	✓		✓
CP789-26	Pistol	✓		✓
CP789-42	Pistol	✓		✓
CP879	Angle	✓	✓	
CP887	In-line		✓	

## REDIPOWER – DRILLS

SPECIFICATION

PICTURE REF	MODEL	PART NO	FREE SPEED		POWER		CHUCK CAPACITY		SPINDLE THREAD		AIR CONSUMPTION		NOISE LEVEL	SOUND POWER	VIBRATION	OVERALL LENGTH		NET WEIGHT	
			rpm	hp	kW	in.	mm		cfm	ls <sup>1</sup>	dB(A)	dB(A)	ms <sup>2</sup>	in.	mm	lb	kg		
A	CP785	TO22698	2400	0.5	0.37	3/8"	10	3/8"-24	12	5.7	90	100	<2.5	7	178	2 1/4	1		
B	CP785H	TO24134	500	0.5	0.37	1/2"	13	3/8"-24	12	5.7	91	101	<2.5	7 3/4	194	3	1.4		
C	CP789HR	TO25165	500	0.5	0.37	1/2"	13	3/8"-24	15	7.1	99	109	<2.5	8.1	206	3.2	1.5		
D	CP789-26	TO25180	2600	0.5	0.37	3/8"	10	3/8"-24	15	7.1	101	111	<2.5	6.9	175	2.5	1.1		
D	CP789-42	TO25198	4200	0.5	0.37	3/8"	10	3/8"-24	15	7.1	104	114	<2.5	6.9	175	2.5	1.1		
E	CP879	TO23999	1800	0.5	0.37	3/8"	10	3/8"-24	16	7.5	98	108	<2.5	8 1/4	206	2 1/4	1.0		
F	CP887	TO24163	2500	0.3	0.22	3/8"	10	3/8"-24	16	7.5	98	108	<2.5	8	200	2 1/4	1.0		