



Content

RediPower

The New Generation of Industrial Power Tools

CP is proud to announce the new expanded line of general duty industrial power tools. Understanding your needs and improving your productivity are key to our product development process. Our innovative product development centers located in France, UK & USA strive to ensure that we can offer the right tool for your applications.

Through a combination of durability, reliability and 'fit for purpose' products the RediPower line of tools represent excellent value for money.

All CP tools are designed and manufactured to the standards you expect from a quality power tool manufacturer.

Irrespective of your requirements for power tool performance & productivity CP are able to offer tools to suit every need whether they are used for intensive industrial production, general production or intermittent use.



At CP we understand that you have a choice of power tool supply and we aim to provide you with the information and options necessary to allow you make the correct choice for your production environment. Furthermore, our own personnel are available regionally and internationally to provide local services. Our comprehensive sales and distribution network ensure that help and advice are always available.

WHICH TOOLS BEST SUIT YOUR NEEDS?

Application	Industrial Tools	RediPower Tools
High Productivity	***	*
General Productivity	***	**
Light Productivity	***	***
Maintenance & Repair Operations	***	***
2000 hours Service Interval	***	*
500 hours Service Interval	***	***
Advanced Ergonomics	***	**
Ultimate	***	Good ** Not suitable *

For more information concerning our Industrial tools please ask for publication 205 048 406 3 / USA and 205 048 401 3 / UK



Impact wrenches
pages 4 to 8



Ratchet wrenches
page 9



Screwdrivers
pages 10 to 12



Sanders
page 13



Grinders, Saws
pages 14 to 15



Hammers, Chippers, Engraving pen
page 16



Drills
pages 17 to 19



Accessories
page 20

IMPACT WRENCHES - 3/8" DRIVE

RP9521

FEATURES

- Rocking Dog clutch
- Built in power regulator
- Ergonomic grip

ADVANTAGES

- Good for very soft joints
- Quick torque adjustment
- Operator comfort

BENEFITS

- Fast cycle time
- Improved quality
- Improved productivity



Noise level: 84 dB(A) - Sound Power: 95 dB(A) - Vibration: 4.9 m/s²

Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9521	615 190 952 1	3/8	Friction Ring	6.8-70	5-50	122	90	4.7	10	146	5.75	1.2	2.6

RP9522

FEATURES

- Rocking Dog clutch
- Butterfly start / reverse valve
- 360° air inlet swivel connector
- Built in power regulator

ADVANTAGES

- Good for very soft joints
- Quick direction change
- Operator comfort
- Quick torque adjustment

BENEFITS

- Fast cycle time
- Versatility
- Improved productivity
- Improved quality



Noise level: 86 dB(A) - Sound Power: 97 dB(A) - Vibration: 2.6 m/s²

Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9522	615 190 952 2	3/8	Friction Ring	6.8-70	5-50	122	90	4.7	10	146	5.75	0.9	2.0

RP9524

FEATURES

- Dyna Pact™ clutch
- Through handle air exhaust
- Compact & Ergonomic
- Built in power regulator

ADVANTAGES

- High torque in small package
- Exhaust directed away from work piece
- Easy to handle tool
- Quick torque adjustment

BENEFITS

- Versatility
- Operator comfort
- Improved productivity
- Improved quality



Noise level: 94 dB(A) - Sound Power: 105 dB(A) - Vibration: <2.5 m/s²

Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9524	615 190 952 4	3/8	Friction Ring	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1

RP9525

FEATURES

- All per RP9524
- Pin type socket retainer
- Built in power regulator

ADVANTAGES

- Positive socket retention
- Quick torque adjustment

BENEFITS

- Security
- Improved quality



Noise level: 94 dB(A) - Sound Power: 105 dB(A) - Vibration: <2.5 m/s²

Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9525	615 190 952 5	3/8	Pin	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1

IMPACT WRENCHES - 1/2" DRIVE

RP9526 **FEATURES** **ADVANTAGES** **BENEFITS**



- All per RP9524
- Compact Tool with 1/2" square drive
- Friction ring socket retention
- Built in power regulator
- Wide range of socket sizes available
- Quick change socket capability
- Quick torque adjustment
- **Flexibility**
- **Flexibility**
- **Improved quality**

Noise level: 94 dB(A) - Sound Power: 105 dB(A) - Vibration: <2.5 m/s²

Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9526	615 190 952 6	1/2	Friction Ring	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1

RP9527 **FEATURES** **ADVANTAGES** **BENEFITS**



- All per RP9524
- Compact Tool with 1/2" square drive
- Pin type socket retainer
- Built in power regulator
- Wide range of socket sizes available
- Positive socket retention
- Quick torque adjustment
- **Flexibility**
- **Security**
- **Improved quality**

Noise level: 94 dB(A) - Sound Power: 105 dB(A) - Vibration: <2.5 m/s²

Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9527	615 190 952 7	1/2	Pin	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1

RP9540 **FEATURES** **ADVANTAGES** **BENEFITS**



- Dyna Pact™ clutch
- Through handle air exhaust
- Compact & Ergonomic
- Built in power regulator
- High torque in small package
- Exhaust directed away from work piece
- High torque to size package
- Quick torque adjustment
- **Versatility**
- **Operator comfort**
- **Improved productivity**
- **Improved quality**

Noise level: 94 dB(A) - Sound Power: 105 dB(A) - Vibration: <2.5 m/s²

Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9540	615 190 954 0	1/2	Friction Ring	34-420	25-310	576	425	7.1	15	191	7.5	2.3	5.1

RP9541 **FEATURES** **ADVANTAGES** **BENEFITS**



- Steel clutch housing
- Pin clutch in oil bath
- 3-piece construction
- Built in power regulator
- Withstands rough use
- Ideal for fast rundown with high torque
- Ease of maintenance
- Quick torque adjustment
- **Durability**
- **Durability & productivity**
- **Productivity**
- **Improved quality**


Noise level: 89 dB(A) - Sound Power: 100 dB(A) - Vibration: 2.7 m/s²

Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9541	615 190 954 1	1/2	Friction Ring	27-245	20-180	374	275	6.6	14	168	6.6	2.5	5.5

IMPACT WRENCHES - 1/2" DRIVE

RP9542
FEATURES
ADVANTAGES
BENEFITS



- All per RP9541
- Pin type socket retainer
- Built in power regulator


- Positive socket retention
- Quick torque adjustment

- Security**
- Improved quality**

Noise level: 89 dB(A) - Sound Power: 100 dB(A) - Vibration: 2.7 m/s² Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9542	615 190 954 2	1/2	Pin	27-245	20-180	374	275	6.6	14	168	6.6	2.5	5.5

RP9543
FEATURES
ADVANTAGES
BENEFITS



- All per RP9541
- Quick change chuck
- Built in power regulator


- Ideal for multiple applications
- Quick torque adjustment

- Flexibility & productivity**
- Improved quality**

Noise level: 89 dB(A) - Sound Power: 100 dB(A) - Vibration: 2.7 m/s² Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9543	615 190 954 3	7/16 hex	Quick change	27-245	20-180	374	275	6.6	14	199	7.8	2.6	5.8

RP9545
FEATURES
ADVANTAGES
BENEFITS



- New SpringHammer™ clutch
- High reverse torque
- New grip and trigger design
- Built in power regulator

- High durability
- Ideal for rework operations
- Operator comfort
- Quick torque adjustment

- Longer life**
- Flexibility & productivity**
- Productivity**
- Improved quality**

Noise level: 96 dB(A) - Sound Power: 107 dB(A) - Vibration: 4 m/s² Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9545	615 190 954 5	1/2	Friction Ring	34-420	25-310	644	475	9	19	180	7.1	2.5	5.6


RP9550 & RP9552
FEATURES
ADVANTAGES
BENEFITS

with SOCKET KIT

- All per RP9540
- Tool carry case with socket set

- Portability of tool and sockets

- Time saving convenience**




Noise level: 94dB(A) - Sound Power: 105 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9550	615 190 955 0	1/2	Friction Ring	34-420	25-310	576	425	7.1	15	191	7.5	2.3	5.1
sockets 1/2", 5/8", 3/4", 7/8", 15/16" AF													
RP9552	615 190 955 2	1/2	Friction Ring	34-420	25-310	576	425	7.1	15	191	7.5	2.3	5.1
sockets 14, 16, 17, 19 & 22 mm A/F													

IMPACT WRENCHES - 3/4" DRIVE

RP9547




FEATURES		ADVANTAGES				BENEFITS			
<ul style="list-style-type: none"> • Jumbo Dog clutch • Steel clutch housing • Ergonomic grip • Built in power regulator 		<ul style="list-style-type: none"> • Good for soft & hard joints • Withstands rough use • Operator comfort • Quick torque adjustment 				<ul style="list-style-type: none"> • Versatility • Durability • Improved productivity • Improved quality 			

Noise level: 97 dB(A) - Sound Power: 108 dB(A) - Vibration: 8 m/s² Air inlet: 3/8" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9547	615 190 954 7	3/4	Hole	135-810	100-600	1285	950	18.4	39	226	8.9	5.75	12.6

RP9549




FEATURES		ADVANTAGES				BENEFITS			
<ul style="list-style-type: none"> • All per RP9547 • Friction ring socket retention • Built in power regulator 		<ul style="list-style-type: none"> • Quick change socket capability • Quick torque adjustment 				<ul style="list-style-type: none"> • Flexibility • Improved quality 			

Noise level: 97 dB(A) - Sound Power: 108 dB(A) - Vibration: 8 m/s² Air inlet: 3/8" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9549	615 190 954 9	3/4	Friction Ring	135-810	100-600	1285	950	18.4	39	226	8.9	5.75	12.6

RP9560




FEATURES		ADVANTAGES				BENEFITS			
<ul style="list-style-type: none"> • Pin clutch • High power to weight ratio • Ergonomic grip • Built in power regulator 		<ul style="list-style-type: none"> • Good for hard joints • Operator comfort • Operator comfort • Quick torque adjustment 				<ul style="list-style-type: none"> • Durability • Improved productivity • Improved productivity • Improved quality 			

Noise level: 99 dB(A) - Sound Power: 110 dB(A) - Vibration: 4.9 m/s² Air inlet: 3/8" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9560	615 190 956 0	3/4	Friction Ring	200-950	150-700	1360	1000	11.3	24	244	9.6	4.8	10.5

RP9561




FEATURES		ADVANTAGES				BENEFITS			
<ul style="list-style-type: none"> • Steel clutch housing • Pin clutch in oil bath • 3-piece construction • Built in power regulator 		<ul style="list-style-type: none"> • Withstands rough use • Ideal for fast rundown with high torque • Ease of maintenance • Quick torque adjustment 				<ul style="list-style-type: none"> • Durability • Durability & productivity • Productivity • Improved quality 			

Noise level: 100 dB(A) - Sound Power: 111 dB(A) - Vibration: 5.1 m/s² Air inlet: 3/8" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9561	615 190 956 1	3/4	Hole	102-680	75-500	1020	750	14.1	30	216	8.5	4.8	10.5

RP9551 & RP9553
with SOCKET KIT





FEATURES		ADVANTAGES				BENEFITS			
<ul style="list-style-type: none"> • All per RP9560 • Tool carry case with socket set 		<ul style="list-style-type: none"> • Portability of tool and sockets 				<ul style="list-style-type: none"> • Time saving convenience 			

Noise level: 99 dB(A) - Sound Power: 110 dB(A) - Vibration: 4.9 m/s² Air inlet: 3/8" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9551	615 190 955 1	3/4	Friction Ring	200-950	150-700	1360	1000	11.3	24	244	9.6	4.8	10.5
sockets 15/16", 1", 1 1/16", 1 1/8" AF													
RP9553	615 190 955 3	3/4	Friction Ring	200-950	150-700	1360	1000	11.3	24	244	9.6	4.8	10.5
sockets 24, 27, 30, 32 mm A/F													

IMPACT WRENCHES - 1" DRIVE

 **RP9548**
FEATURES
ADVANTAGES
BENEFITS




- All per RP9547
- Compact Tool with 1" square drive
- Built in power regulator


- Large socket sizes available
- Quick torque adjustment

- Flexibility
- Improved quality

Noise level: 97 dB(A) - Sound Power: 108 dB(A) - Vibration: 8 m/s² Air inlet: 3/8" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9548	615 190 954 8	1	Hole	135-810	100-600	1285	950	18.4	39	226	8.9	5.75	12.6

 **RP9582**
FEATURES
ADVANTAGES
BENEFITS




- Rocking Dog clutch
- Progressive tease throttle
- Trigger located inside grip


- Ideal for soft pull up & prevailing torque joints
- Allows slow start for ease of bolt starting
- Easy of handing

- Fast cycle time
- Improved quality
- Operator comfort

Noise level: 110 dB(A) - Sound Power: 121 dB(A) - Vibration: 4.3 m/s² Air inlet: 1/2" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9582	615 190 958 2	1	Hole	200-1225	150-900	1900	1400	18.9	40	394	15.5	12.3	27.0

 **RP9583**
FEATURES
ADVANTAGES
BENEFITS




- All per RP9582
- 6" extended anvil


- Enables operation in confined access areas

- Versatility

Noise level: 110 dB(A) - Sound Power: 121 dB(A) - Vibration: 4.3 m/s² Air inlet: 1/2" NPTF

MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9583	615 190 958 3	1	Friction Ring	200-1225	150-900	1900	1400	18.9	40	564	22.2	13.5	29.8

 **RP9597**
FEATURES
ADVANTAGES
BENEFITS



- Steel clutch housing
- 2 Jaw clutch in oil bath
- 3-piece construction


- Withstands rough use
- Good for both soft & hard joint applications
- Ease of maintenance


- Durability
- Durability & productivity
- Productivity


Noise level: 101 dB(A) - Sound Power: 112 dB(A) - Vibration: 13 m/s² Air inlet: 1/2" NPTF


MODEL	PART NUMBER	SQUARE DRIVE	SOCKET RETAINER	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
				Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb
RP9597	615 190 959 7	1	Hole	380-2450	280-1800	3790	2800	22.7	48	241	9.5	9.1	20


RATCHET WRENCHES

RP9425		FEATURES	ADVANTAGES	BENEFITS									
		<ul style="list-style-type: none"> • Compact 1/4" square drive ratchet wrench • Easy change reverse mechanism • Progressive tease throttle 	<ul style="list-style-type: none"> • Ideal for tight access applications • Quick direction change • Variable speed & torque output 	<ul style="list-style-type: none"> • Versatility • Flexibility • Accomodates various applications 									
		Noise level: 87 dB(A) - Sound Power: 98 dB(A) - Vibration: 6.2 m/s ²		Air inlet: 1/4" NPTF									
MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in.	tr/min	MIN.	ft lb	MAX.	ft lb	l/s	cfm	mm	in.	kg	lb
RP9425	615 191 942 5	1/4	200	7	5	20	15	4.7	10	165	6.5	0.85	1.9

RP9429		FEATURES	ADVANTAGES	BENEFITS									
		<ul style="list-style-type: none"> • High Power with 3/8" square drive • Full torque in reverse 	<ul style="list-style-type: none"> • High torque in small package • Ideal for disassembly operations 	<ul style="list-style-type: none"> • Versatility • Flexibility 									
		Noise level: 97 dB(A) - Sound Power: 108 dB(A) - Vibration: 7.9 m/s ²		Air inlet: 1/4" NPTF									
MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in.	tr/min	MIN.	ft lb	MAX.	ft lb	l/s	cfm	mm	in.	kg	lb
RP9429	615 191 942 9	3/8	150	14	10	68	50	7.5	16	254	10	1.2	2.6

RP9430		FEATURES	ADVANTAGES	BENEFITS									
		<ul style="list-style-type: none"> • All per RP9429 • 1/2" square drive 	<ul style="list-style-type: none"> • Accomodates larger socket range 	<ul style="list-style-type: none"> • Flexibility 									
		Noise level: 97 dB(A) - Sound Power: 108 dB(A) - Vibration: 7.9 m/s ²		Air inlet: 1/4" NPTF									
MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in.	tr/min	MIN.	ft lb	MAX.	ft lb	l/s	cfm	mm	in.	kg	lb
RP9430	615 191 943 0	1/2	150	14	10	68	50	7.5	16	254	10	1.2	2.6

RP9431		FEATURES	ADVANTAGES	BENEFITS									
		<ul style="list-style-type: none"> • High Torque capability • Full torque in reverse • Lightweight with composite grip 	<ul style="list-style-type: none"> • Ideal for larger fasteners • Ideal for disassembly operations • Operator comfort 	<ul style="list-style-type: none"> • Versatility • Flexibility • Improved productivity 									
		Noise level: 97dB(A) - Sound Power: 108 dB(A) - Vibration: 14.8 m/s ²		Air inlet: 1/4" NPTF									
MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in.	tr/min	MIN.	ft lb	MAX.	ft lb	l/s	cfm	mm	in.	kg	lb
RP9431	615 191 943 1	3/8	190	14	10	122	90	18.5	39	305	12	1.2	2.7

RP9432		FEATURES	ADVANTAGES	BENEFITS									
		<ul style="list-style-type: none"> • All per RP9431 • 1/2" square drive 	<ul style="list-style-type: none"> • Accomodates larger socket range 	<ul style="list-style-type: none"> • Flexibility 									
		Noise level: 97dB(A) - Sound Power: 108 dB(A) - Vibration: 14.8 m/s ²		Air inlet: 1/4" NPTF									
MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		in.	tr/min	MIN.	ft lb	MAX.	ft lb	l/s	cfm	mm	in.	kg	lb
RP9432	615 191 943 2	1/2	190	14	10	122	90	18.5	39	305	12	1.2	2.7

SCREWDRIVERS

RP2754 FEATURES ADVANTAGES BENEFITS



- Direct drive reversible screwdriver
- High speed
- Ergonomic grip pistol drill
- Suitable for variable torque application
- Fast screw rundown
- Operator comfort
- Ideal for self drilling screwfastening
- Productivity
- Improved productivity

Noise level: 77 dB(A) - Vibration: <2.5 m/s²

Air inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	FREE SPEED tr/min	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			MIN. Nm	IN lb	MAX. Nm	IN lb	I/s	cfm	mm	in.	kg	lb
RP2754	615 192 275 4	1450	-	-	5.0	44	8	17	210	8.3	0.9	2.0

RP2764 FEATURES ADVANTAGES BENEFITS



- Direct drive reversible screwdriver
- Slow speed
- Ergonomic grip pistol drill
- Suitable for variable torque application
- High torque
- Operator comfort
- Ideal for self drilling screwfastening
- Ideal for larger screw sizes
- Improved productivity

Noise level: 77 dB(A) - Vibration: <2.5 m/s²

Air inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	FREE SPEED tr/min	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			MIN. Nm	IN lb	MAX. Nm	IN lb	I/s	cfm	mm	in.	kg	lb
RP2764	615 192 276 4	600	-	-	14	124	8	17	228	9	1.0	2.2

RP2003 FEATURES ADVANTAGES BENEFITS



- Push to start operation
- Shut off clutch
- Quick change reverse operation
- Ideal for continuous operation
- Positive shut off at preset torque
- Reduces time during rework
- Productivity
- Improved quality
- Improved productivity

Noise level: 73 dB(A) - Vibration: <2.5 m/s²

Air inlet: 1/8" BSP

MODEL	PART NUMBER	FREE SPEED tr/min	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			MIN. Nm	IN lb	MAX. Nm	IN lb	I/s	cfm	mm	in.	kg	lb
RP2003	615 192 200 3	1100	0.4	3.5	1.5	13	4.1	9	197	7.7	0.4	0.92

RP2007 FEATURES ADVANTAGES BENEFITS




- Push to start operation
- Quick change reverse operation
- Shut off clutch
- Ideal for continuous operation
- Reduces time during rework
- Positive shut off at preset torque
- Productivity
- Improved productivity
- Improved quality


Noise level: 81 dB(A) - Vibration: <2.5 m/s²


Air inlet: 1/8" BSP


MODEL	PART NUMBER	FREE SPEED tr/min	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			MIN. Nm	IN lb	MAX. Nm	IN lb	I/s	cfm	mm	in.	kg	lb
RP2007	615 192 200 7	1100	0.4	3.5	4.3	38	6.5	14	250	9.8	0.6	1.3

SCREWDRIVERS

RP2010		FEATURES	ADVANTAGES	BENEFITS								
		<ul style="list-style-type: none"> • Push to start operation • Quick change reverse operation • High speed • Shut off clutch 	<ul style="list-style-type: none"> • Ideal for continuous operation • Reduces time during rework • Faster cycle times • Positive shut off at preset torque 	<ul style="list-style-type: none"> • Productivity • Improved productivity • Improved productivity • Improved quality 								
		Noise level: 76 dB(A) - Vibration: <2.5 m/s ²		Air inlet: 1/4" BSP								
MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		tr/min	MIN.	MAX.								
			Nm	in lb	Nm	in lb	l/s	cfm	mm	in.	kg	lb
RP2010	615 192 201 0	1470	2.0	18	5.5	49	9	20	253	10	0.9	2.0


RP2008		FEATURES	ADVANTAGES	BENEFITS								
		<ul style="list-style-type: none"> • Progressive lever start • Shut off clutch • Reversible 	<ul style="list-style-type: none"> • Ideal for centering screws during the fastening cycle • Positive shut off at preset torque • Use for disassembly operations 	<ul style="list-style-type: none"> • Improved quality • Improved quality • Versatility 								
		Noise level: 76 dB(A) - Vibration: <2.5 m/s ²		Air inlet: 1/8" BSP								
MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		tr/min	MIN.	MAX.								
			Nm	in lb	Nm	in lb	l/s	cfm	mm	in.	kg	lb
RP2008	615 192 200 8	1100	0.4	3.5	4.3	38	6.5	14	275	10.8	0.7	1.5

RP2012		FEATURES	ADVANTAGES	BENEFITS								
		<ul style="list-style-type: none"> • Progressive lever start • Shut off clutch • High speed 	<ul style="list-style-type: none"> • Ideal for centering screws during the fastening cycle • Positive shut off at preset torque • Faster cycle times 	<ul style="list-style-type: none"> • Improved quality • Improved quality • Improved productivity 								
		Noise level: 73 dB(A) - Vibration: <2.5 m/s ²		Air inlet: 1/8" BSP								
MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		tr/min	MIN.	MAX.								
			Nm	in lb	Nm	in lb	l/s	cfm	mm	in.	kg	lb
RP2012	615 192 201 2	1470	2.0	18	5.5	49	9	20	278	10.9	0.9	2.0

RP2005		FEATURES	ADVANTAGES	BENEFITS								
		<ul style="list-style-type: none"> • Compact pistol grip • One hand operation reverse valve • Shut off clutch 	<ul style="list-style-type: none"> • Ergonomic • Ergonomic • Positive shut off at preset torque 	<ul style="list-style-type: none"> • Operator comfort • Operator comfort • Improved quality 								
		Noise level: 76 dB(A) - Vibration: <2.5 m/s ²		Air inlet: 1/8" BSP								
MODEL	PART NUMBER	FREE SPEED	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		tr/min	MIN.	MAX.								
			Nm	in lb	Nm	in lb	l/s	cfm	mm	in.	kg	lb
RP2005	615 192 200 5	1100	0.4	3.5	4.3	38	6.5	14	182	7.2	0.8	1.8

SCREWDRIVERS

RP2015



FEATURES

- Ergonomic formed grip
- High speed
- Shut off clutch

ADVANTAGES

- Operator comfort
- Fast screwfastening
- Positive shut off at preset torque


BENEFITS

- Improved productivity
- Improved productivity
- Improved quality

Noise level: 81 dB(A) - Vibration: <math><2.5\text{ m/s}^2</math> Air inlet: 1/4" BSP

MODEL	PART NUMBER	FREE SPEED tr/min	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			MIN.		MAX.		l/s	cfm	mm	in.	kg	lb
			Nm	In lb	Nm	in lb						
RP2015	615 192 201 5	1470	2.0	18	5.5	49	9	20	220	8.7	1	2.2

RP2009



FEATURES

- Progressive lever start
- Roller clutch
- Reversible

ADVANTAGES

- Ideal for centering screws during the fastening cycle
- Ideal for multiple applications
- Use for disassembly


BENEFITS

- Improved quality
- Flexibility
- Versatility

Noise level: 77 dB(A) - Vibration: 9 - 35 m/s² Air inlet: 1/8" BSP

MODEL	PART NUMBER	FREE SPEED tr/min	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			MIN.		MAX.		l/s	cfm	mm	in.	kg	lb
			Nm	In lb	Nm	in lb						
RP2009	615 192 200 9	1100	0.4	3.5	4.4	39	6.5	14	250	9.8	0.6	1.3

RP2011



FEATURES

- Roller clutch combined with high speed
- Progressive lever start
- High speed

ADVANTAGES

- Ideal for multiple applications
- Ideal for centering screws during the fastening cycle
- Faster cycle times


BENEFITS

- Flexibility
- Improved quality
- Improved productivity

Noise level: 73 dB(A) - Vibration: 16.1 m/s² Air inlet: 1/4" BSP

MODEL	PART NUMBER	FREE SPEED tr/min	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			MIN.		MAX.		l/s	cfm	mm	in.	kg	lb
			Nm	In lb	Nm	in lb						
RP2011	615 192 201 1	1470	2.0	18	5.5	49	9	20	278	10.9	0.9	2.0

RP2006



FEATURES

- Compact pistol grip
- Roller clutch combined with high speed
- One hand operation reverse valve

ADVANTAGES

- Ergonomic
- Ideal for multiple applications
- Ergonomic


BENEFITS

- Operator comfort
- Flexibility
- Operator comfort

Noise level: 75 dB(A) - Vibration: 2.3 - 3.9 m/s² Air inlet: 1/8" BSP

MODEL	PART NUMBER	FREE SPEED tr/min	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			MIN.		MAX.		l/s	cfm	mm	in.	kg	lb
			Nm	In lb	Nm	in lb						
RP2006	615 192 200 6	1100	0.4	3.5	4.4	39	6.5	14	182	7.2	0.8	1.8

RP2014



FEATURES

- Ergonomic formed grip
- Roller clutch
- High speed

ADVANTAGES

- Operator comfort
- Ideal for multiple applications
- Faster cycle times

BENEFITS


- Improved productivity
- Flexibility
- Improved productivity

Noise level: 81 dB(A) - Vibration: 3.2 m/s² Air inlet: 1/4" BSP

MODEL	PART NUMBER	FREE SPEED tr/min	TORQUE RANGE				AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			MIN.		MAX.		l/s	cfm	mm	in.	kg	lb
			Nm	In lb	Nm	in lb						
RP2014	615 192 201 4	1470	2.0	18	5.5	49	9	20	220	8.7	1	2.2

SANDERS

RP9534



FEATURES

- 4-in-1 modular sander
- High quality "hook-it" sanding pad
- 3/16" (5mm) random orbit

ADVANTAGES

- Can be configured to suit application/operator
- Long lasting
- Ideal for fine finishing operations


BENEFITS

- Flexibility
- Improved productivity
- Improved productivity

Noise level: 83 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	PAD SIZE		SPINDLE THREAD	FREE SPEED	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		mm	in.			l/s	cfm	mm	in.	kg	lb
RP9534	615 193 953 4	150	6	5/16"-24f	9000	8.97	19	190	7.5	1.3	2.9

RP9674



FEATURES

- 4-in-1 modular sander
- High quality "hook-it" sanding pad
- 3/8" (10mm) random orbit

ADVANTAGES

- Can be configured to suit application/operator
- Long lasting
- Ideal for fast stock removal


BENEFITS

- Flexibility
- Improved productivity
- Improved productivity

Noise level: 83 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	PAD SIZE		SPINDLE THREAD	FREE SPEED	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		mm	in.			l/s	cfm	mm	in.	kg	lb
RP9674	615 193 967 4	150	6	5/16"-24f	9000	8.97	19	190	7.5	1.3	2.9

RP9164



FEATURES

- General duty sander
- Rotary & orbital option

ADVANTAGES

- Ideal for multiple applications
- Fine finishing & rapid stock removal


BENEFITS

- Flexibility
- Versatility

Noise level: 90 dB(A) - Sound Power: 101 dB(A) - Vibration: 7.3m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	PAD SIZE		SPINDLE THREAD	FREE SPEED	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		mm	in.			l/s	cfm	mm	in.	kg	lb
RP9164	615 193 916 4	152	6	5/16"-24f	9600	8.8	18	222	8.75	1.7	3.8

RP9776



FEATURES

- Mini rotary sander
- Adjustable speed regulator
- Through handle exhaust

ADVANTAGES

- Ideal for small area work
- Match the speed to the job
- Directs exhaust air away from operator/workpiece


BENEFITS

- Ease of use
- Improved productivity
- Operator comfort

Noise level: 77 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	PAD SIZE		SPINDLE THREAD	FREE SPEED	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		mm	in.			l/s	cfm	mm	in.	kg	lb
RP9776	615 193 977 6	76	3	3/8" x 24	14000	8.9	19	121	4.7	0.7	1.5

RP9778



FEATURES

- High speed sander
- Variable speed throttle
- Lightweight

ADVANTAGES

- Ideal for tight access work
- Match the speed to the application
- Ease of handling


BENEFITS

- Flexibility
- Improved productivity
- Operator comfort

Noise level: 90 dB(A) - Sound Power: 101 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	PAD SIZE		SPINDLE THREAD	FREE SPEED	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		mm	in.			l/s	cfm	mm	in.	kg	lb
RP9778	615 193 977 8	127	5	7/16" - 20	18500	12	26	203	8	1.0	2.3

GRINDERS



RP9104

FEATURES

ADVANTAGES

BENEFITS


- Compact Pencil Grinder
- Good power to size ratio

- Good manoeuvrability
- Lightweight

- Ideal for intricate work
- Operator comfort

Noise level: 74 dB(A) - Vibration: 8.3 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED tr/min	COLLET SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp		mm	in.	l/s	cfm	mm	in.	kg	lb
RP9104	615 195 910 4	0.04	0.054	60000	3	1/8	3.5	7	133	5.2	0.2	0.5



RP9105

FEATURES

ADVANTAGES

BENEFITS


- Composite body overmould
- Variable speed regulator
- Rear exhaust

- Ergonomic grip
- Optimum speed selection
- Directs exhaust away from the operator & workpiece

- Operator Comfort
- Productivity
- Operator Comfort

Noise level: 84 dB(A) - Vibration: 6.8 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED tr/min	COLLET SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp		mm	in.	l/s	cfm	mm	in.	kg	lb
RP9105	615 195 910 5	0.18	0.25	33500	6	1/4	9	19	155	6.1	0.6	1.2



RP9106

FEATURES


ADVANTAGES

BENEFITS

- Similar features to RP9105

Noise level: 84 dB(A) - Vibration: 3.6m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED tr/min	COLLET SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp		mm	in.	l/s	cfm	mm	in.	kg	lb
RP9106	615 195 910 6	0.18	0.25	26500	6	1/4	9	19	159	6.2	0.6	1.2



RP9107

FEATURES

ADVANTAGES

BENEFITS

- Pistol grip
- Adjustable speed regulator
- Through handle exhaust

- Ideal for small horizontal application
- Match the speed to the job
- Directs exhaust air away from operator/workpiece

- Operator comfort
- Improved productivity
- Operator comfort

Noise level: 81 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED tr/min	COLLET SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp		mm	in.	l/s	cfm	mm	in.	kg	lb
RP9107	615 195 910 7	0.15	0.2	17000	6	1/4	8.5	16	120	4.7	0.7	1.5

GRINDERS / SAWS

RP9108 FEATURES ADVANTAGES BENEFITS

- All the features & benefits RP 9105

Noise level: 84 dB(A) - Vibration: 4.4 m/s²

Air inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED tr/min	COLLET SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp		mm	in.	l/s	cfm	mm	in.	kg	lb
RP9108	615 195 910 8	0.18	0.25	25500	6	1/4	9	19	193	7.6	0.6	1.2

RP9110 FEATURES ADVANTAGES BENEFITS

- All the features & benefits of RP9105
- Extended spindle
- Ideal when longer reach is required
- Versatility

Noise level: 84 dB(A) - Vibration: 4 m/s²

Air inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED tr/min	COLLET SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp		mm	in.	l/s	cfm	mm	in.	kg	lb
RP9110	615 195 911 0	0.18	0.25	32000	6	1/4	9	19	250	9.9	0.9	1.9

RP9120 FEATURES ADVANTAGES BENEFITS

- Powerful motor
- Alloy body
- Side handle supplied
- High performance
- Lightweight durability
- Easier handling
- Productivity
- Operator comfort
- Improved operator control

Noise level: 84 dB(A) - Vibration: 7.5 m/s² - Spindle thread 3/8" x 24'

Air inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED tr/min	WHEEL SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp		mm	in.	l/s	cfm	mm	in.	kg	lb
RP9120	615 195 912 0	0.5	0.68	14000	102	4	10	21	229	9	1.8	4.0

RP9121 FEATURES ADVANTAGES BENEFITS

- All the feature and benefits of RP9120 in a 5" (127mm) wheel format

Noise level: 84 dB(A) - Vibration: 8.1m/s² - Spindle thread 3/8" x 24'

Air inlet: 1/4" NPT

MODEL	PART NUMBER	POWER		FREE SPEED tr/min	WHEEL SIZE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		kw	hp		mm	in.	l/s	cfm	mm	in.	kg	lb
RP9121	615 195 912 1	0.5	0.68	12000	127	5	10	21	229	9	1.9	4.2

RP9881 FEATURES ADVANTAGES BENEFITS

- Heavy duty reciprocating saw
- Universal saw blade holder
- Lock off lever throttle
- Accepts standard saw blades
- Reduces the risk of inadvertent starting
- Economical
- Improved safety

Noise level: 81 dB(A) - Vibration: <2.5 m/s²

Air inlet: 1/4" NPT

MODEL	PART NUMBER	STROKE LENGTH		BLOWS PER MINUTE	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
		mm	in.		l/s	cfm	mm	in.	kg	lb
RP9881	615 197 988 1	25	1	5000	13	27	268	10.5	1	2.2

HAMMERS / CHIPPERS / ENGRAVING PEN

RP9536

FEATURES

- Air Hammer with Composite body
- Unique vibration damping
- Tease throttle

ADVANTAGES

- Comfort
- Less operator reaction
- Slow start up

BENEFITS

- **Productivity**
- **Improved operator comfort**
- **Improved control**

Noise level: 97 dB(A) - Sound Power: 108 dB(A) - Vibration: 5.9 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	COLD RIVET CAPACITY DURAL		COLD RIVET CAPACITY STEEL		BORE AND STROKE		BLOWS PER MINUTE	CHISEL RIVET SET SHANK		AIR CONS		OVERALL LENGTH		NET WEIGHT	
		mm	in.	mm	in.	mm	in.		mm	in.	l/s	cfm	mm	in.	kg	lb
RP9536	615 196 953 6	6.4	1/4	4.8	3/16	19x67	3/4x2 ^{5/8}	3200	10.2	0.401	7	14	230	9	1.7	3.7

RP9537

FEATURES

- All the features and benefits of RP9536 with more power

ADVANTAGES

BENEFITS

Noise level: 95 dB(A) - Sound Power: 106 dB(A) - Vibration: 4.2 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	COLD RIVET CAPACITY DURAL		COLD RIVET CAPACITY STEEL		BORE AND STROKE		BLOWS PER MINUTE	CHISEL RIVET SET SHANK		AIR CONS		OVERALL LENGTH		NET WEIGHT	
		mm	in.	mm	in.	mm	in.		mm	in.	l/s	cfm	mm	in.	kg	lb
RP9537	615 196 953 7	7.9	5/16	6.4	1/4	19x90	3/4x3 ^{1/2}	2200	10.2	0.401	8	17	280	11	2.1	4.6

RP9311

FEATURES

- Air Hammer with Aluminium body
- Powerful

ADVANTAGES

- Durable
- Fast action

BENEFITS

- **Withstands tough use**
- **Productivity**

Noise level: 100 dB(A) - Sound Power: 111 dB(A) - Vibration: 8.9 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	COLD RIVET CAPACITY DURAL		COLD RIVET CAPACITY STEEL		BORE AND STROKE		BLOWS PER MINUTE	CHISEL RIVET SET SHANK		AIR CONS		OVERALL LENGTH		NET WEIGHT	
		mm	in.	mm	in.	mm	in.		mm	in.	l/s	cfm	mm	in.	kg	lb
RP9311	615 196 931 1	6.4	1/4	4.8	3/16	19x67	3/4x2 ^{5/8}	3000	10.2	0.401	11.8	25	171	6.7	1.6	3.5

RP9315

FEATURES

- All the features and benefits of RP9311 with more power

ADVANTAGES

BENEFITS

Noise level: 100 dB(A) - Sound Power: 111 dB(A) - Vibration: 9.4 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	COLD RIVET CAPACITY DURAL		COLD RIVET CAPACITY STEEL		BORE AND STROKE		BLOWS PER MINUTE	CHISEL RIVET SET SHANK		AIR CONS		OVERALL LENGTH		NET WEIGHT	
		mm	in.	mm	in.	mm	in.		mm	in.	l/s	cfm	mm	in.	kg	lb
RP9315	615 196 931 5	7.9	5/16	6.4	1/4	19x89	3/4x3 ^{1/2}	2300	10.2	0.401	11.8	25	225	8.9	1.9	4.2

RP9160

FEATURES

- Compact engraving pen
- Finger tip start valve

ADVANTAGES

- Enhanced control

BENEFITS


- **Improved quality marking**

Noise level: 59 dB(A) - Vibration: <7.0 m/s² Air inlet: 1/4" BSP

MODEL	PART NUMBER	BLOWS PER MINUTE	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			l/s	cfm	mm	in.	kg	lb
RP9160	615 197 916 0	32400	0.8	1.69	147	5.8	0.123	0.25

DRILLS

RP 1064



FEATURES

- Compact slimline design pistol drill
- 3/8" (10mm) chuck fitted as standard
- 0.3 HP (230W) @ 2500 rpm

ADVANTAGES

- Ideal for close quarter drilling
- Accommodates wide range of drill bit sizes
- Good power & speed for general drilling


BENEFITS

- Versatility and flexibility
- One tool - many applications
- Productivity

Noise level: 83 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			tr/min	kw	hp	mm		in.	l/s	cfm	mm	in.	kg
RP1064	615 194 106 4	2500	0.23	0.30	10	3/8	3/8"-24f	9.3	19.7	225	8.9	0.7	1.5

RP 1454



FEATURES

- Compact slimline design pistol drill
- 3/8" (10mm) chuck fitted as standard
- 0.3 HP (230W) @ 4300 rpm

ADVANTAGES

- Ideal for close quarter drilling
- Accommodates wide range of drill bit sizes
- Good power & speed for drilling & polishing


BENEFITS

- Versatility and flexibility
- One tool - many applications
- Productivity

Noise level: 83 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			tr/min	kw	hp	mm		in.	l/s	cfm	mm	in.	kg
RP1454	615 194 145 4	4300	0.23	0.30	10	3/8	3/8"-24f	9.3	19.7	225	8.9	0.7	1.5

RP 1664



FEATURES

- Reversible
- Compact slimline design pistol drill
- Sliding reverse valve

ADVANTAGES

- Can be used for drilling & screwdriving
- Ideal for close quarter drilling
- Quick change for forward / reverse


BENEFITS

- One tool - two functions
- Versatility and flexibility
- Productivity

Noise level: 83 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			tr/min	kw	hp	mm		in.	l/s	cfm	mm	in.	kg
RP1664	615 194 166 4	2000	0.19	0.26	10	3/8	3/8"-24f	9.3	19.7	225	8.9	0.7	1.5

RP 1264



FEATURES

- Ergonomic grip pistol drill
- 3/8" (10mm) chuck fitted as standard
- 0.38 HP (280W) @ 2900 rpm

ADVANTAGES

- Operator comfort
- Accommodates wide range of drill bit sizes
- Higher power & speed improves cycle time

BENEFITS


- Improved productivity
- One tool - many applications
- Improved productivity

Noise level: 78 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			tr/min	kw	hp	mm		in.	l/s	cfm	mm	in.	kg
RP1264	615 194 126 4	2900	0.28	0.38	10	3/8	3/8"-24f	9.3	19.7	175	6.9	0.9	2.0

DRILLS

RP1274




FEATURES		ADVANTAGES				BENEFITS			
<ul style="list-style-type: none"> Ergonomic grip pistol drill Keyless chuck 'quick change' 0.38 HP (280W) @ 2900 rpm 		<ul style="list-style-type: none"> Operator comfort Quick drill bit change Higher power & speed improves cycle time 				<ul style="list-style-type: none"> Improved productivity Improved productivity Improved productivity 			

Noise level: 78 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" BSP/NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			tr/min	kw	hp	mm		in.	l/s	cfm	mm	in.	kg
RP1274	615 194 127 4	2900	0.28	0.38	10	3/8	3/8"-24f	9.3	19.7	175	6.9	0.9	2.0

RP9280




FEATURES		ADVANTAGES				BENEFITS			
<ul style="list-style-type: none"> Compact 1/4" capacity chuck Compact & lightweight Progressive throttle 		<ul style="list-style-type: none"> Ideal for close quarter drilling Ease of handling Ideal for drill bit centering 				<ul style="list-style-type: none"> Productivity Operator comfort Improved hole quality 			

Noise level: 82 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			tr/min	kw	hp	mm		in.	l/s	cfm	mm	in.	kg
RP9280	615 194 928 0	3200	0.23	0.3	6.4	1/4	3/8"-24f	9	19	142	5.6	0.6	1.3

RP9285




FEATURES		ADVANTAGES				BENEFITS			
<ul style="list-style-type: none"> Good general speed tool Through handle exhaust Industrial quality chuck 		<ul style="list-style-type: none"> Suitable for many applications Directs exhaust air away from operator/workpiece Durability 				<ul style="list-style-type: none"> Cost effective Operator comfort Productivity 			

Noise level: 89 dB(A) - Sound Power: 100 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			tr/min	kw	hp	mm		in.	l/s	cfm	mm	in.	kg
RP9285	615 194 928 5	2900	0.38	0.50	10	3/8	3/8"-24f	10	21	165	6.5	1.1	2.4

RP9286



FEATURES		ADVANTAGES				BENEFITS			
<ul style="list-style-type: none"> Similar features to RP9285 Large capacity chuck Slow speed 		<ul style="list-style-type: none"> Accommodates larger drill bits Ideal for large hole drilling 				<ul style="list-style-type: none"> Productive for larger holes Drill bit life improved 			

Noise level: 90 dB(A) - Sound Power: 101 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	FREE SPEED	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			tr/min	kw	hp	mm		in.	l/s	cfm	mm	in.	kg
RP9286	615 194 928 6	600	0.37	0.50	13	1/2	3/8"-24f	11.5	24	177	7	1.8	4.0

DRILLS

RP9789

FEATURES

- All the features of RP9286
- Reversible
- Industrial quality chuck

ADVANTAGES

- Ideal for drilling & screwdriving
- Durability

BENEFITS

- Flexibility
- Productivity

Noise level: 90 dB(A) - Sound Power: 101 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	FREE SPEED tr/min	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			kw	hp	mm	in.		l/s	cfm	mm	in.	kg	lb
RP9789	615 194 978 9	800	0.27	0.37	13	1/2	3/8"-24f	11.5	24	177	7	1.8	4.0

RP9790

FEATURES

- All the features of RP9285
- Reversible
- Industrial quality chuck

ADVANTAGES

- Ideal for drilling & screwdriving
- Durability

BENEFITS

- Flexibility
- Productivity

Noise level: 89 dB(A) - Sound Power: 100 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	FREE SPEED tr/min	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			kw	hp	mm	in.		l/s	cfm	mm	in.	kg	lb
RP9790	615 194 979 0	2000	0.27	0.37	10	3/8	3/8"-24f	11.5	24	165	6.5	1.4	3.0

RP9879

FEATURES

- Angle drill with compact head
- Reversible
- Industrial quality chuck

ADVANTAGES

- Ideal for tight access application
- Ideal for drilling & screwdriving
- Durability

BENEFITS

- Productivity
- Flexibility
- Productivity

Noise level: 91 dB(A) - Sound Power: 102 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	FREE SPEED tr/min	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			kw	hp	mm	in.		l/s	cfm	mm	in.	kg	lb
RP9879	615 194 987 9	1300	0.18	0.25	10	3/8	3/8"-24f	8.5	18	200	8	0.7	1.5

RP9887

FEATURES

- In-Line operation
- Contoured body
- Industrial quality chuck

ADVANTAGES

- Ideal for vertical drilling
- More positive grip
- Durability

BENEFITS


- Operator comfort
- Operator comfort
- Productivity

Noise level: 88 dB(A) - Sound Power: 99 dB(A) - Vibration: <2.5 m/s² Air inlet: 1/4" NPT

MODEL	PART NUMBER	FREE SPEED tr/min	POWER		CHUCK CAPACITY		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT	
			kw	hp	mm	in.		l/s	cfm	mm	in.	kg	lb
RP9887	615 194 988 7	2800	0.37	0.5	10	3/8	3/8"-24f	12	26	215	8.5	0.9	2.0


ACCESSORIES

REINFORCED HOSES & FITTINGS

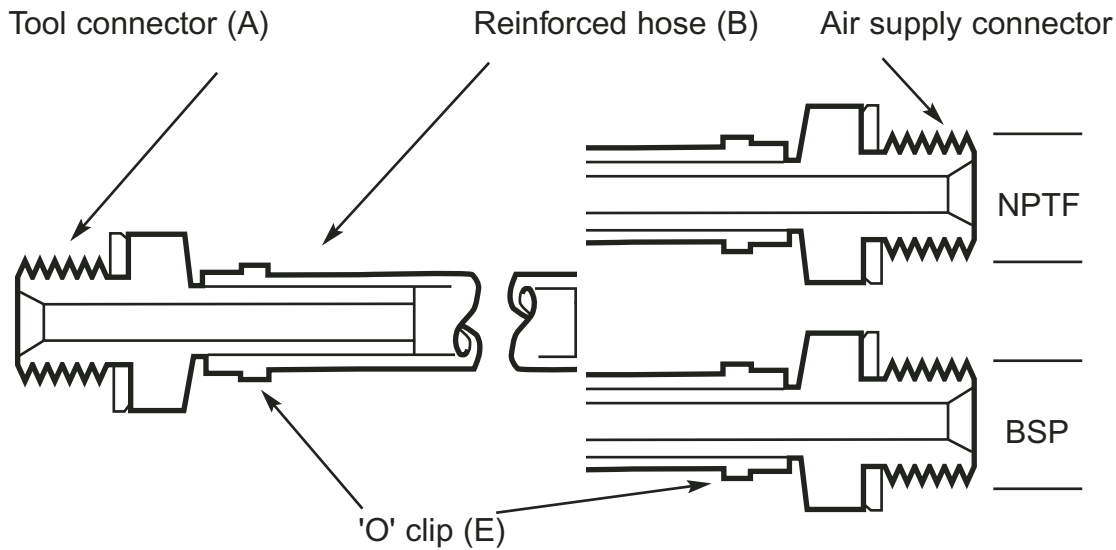

TOOL AIR INLET (NPTF)	HOSE BORE	REINFORCED HOSE (B) Part no.	TOOL CONNECTOR (A) Part no.	AIR SUPPLY CONNECTOR		'O' CLIP Part no.
				(NPTF) Part no.	(BSP) Part no.	
1/4"	6 mm - 1/4"	271403	615 705 0090	615 705 0090	271323	271493
1/4"	10 mm - 3/8"	271413	615 705 0060	615 705 0060	271333	271503
3/8"	10 mm - 3/8"	271413	615 704 0170	615 704 0170		271503
3/8"	12 mm - 1/2"	271423	615 704 0270	615 704 0270		271513
1/2"	12 mm - 1/2"	271423	615 704 0160	615 704 0160		271513

Close the lugs firmly with a pair of O-Clip pincers

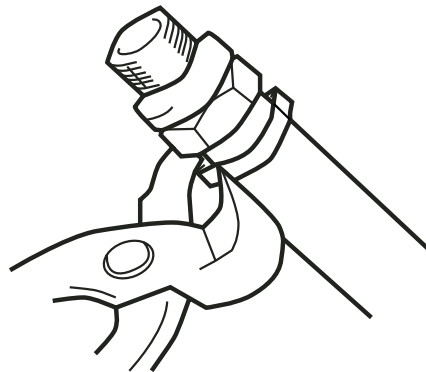


SOCKETS

Ask your CP representative for further detail.




SAFETY INSTRUCTIONS


General Safety Instructions for the Operation of Power Tools

The goal of  is to produce tools that help the operator work safely and efficiently.

The most important safety device for this or any other tool is the operator. Care and good judgement are the best protection against injury.

All possible hazards cannot be covered here, but we have tried to highlight some of the important ones.


Individuals should look for and obey Caution, Warning and Danger signs placed on tools, and displayed in the workplace. Operators should read and follow safety instructions packed with each tool. For a copy of these instructions, contact your  local representative.

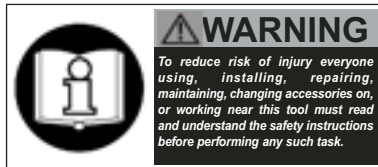

Learn how each tool works. Even if you have previously used similar tools, carefully check out each tool before you use it. Get the 'feel' of it and know its capabilities, limitations, potential hazards, how it operates and how it stops.

All tools are designed to operate at a line pressure of 6.3 bar +/- 0.15bar in accordance with ISO2787.

Sound levels +/- 3dB(A)* measured in accordance with EN ISO15744. Vibration values* measured in accordance with ISO 8662.

*These declared values were obtained by laboratory testing in compliance with stated standards and are not adequate for risk assessments. Values measured in individual work places may be higher than the declared values. The actual exposure values and risk of harm experienced by an individual are unique and depend upon the way the user works, the workplace and the work station design, as well as upon the exposure time and the physical condition of the user. We  cannot be held liable for the consequences of using declared values, instead of values reflecting the actual exposure, in an individual risk assessment in a work place situation over which we have no control.

Tools are CE marked to comply with European Machinery Directive.

Specifications subject to change without prior notice.

Further occupational health and safety information can be obtained from the following web sites:

<http://www.osha.gov> (USA)

<http://europe.osha.eu.int> (Europe).



COMPRESSED AIR HAZARDS

- Air under pressure can cause injury. Never point an air hose at yourself or anyone else. Never blow your clothes free of dust with compressed air. Always direct exhaust air away from yourself and others in the work area.
- Always check for damaged or loose hoses and fittings before using an air tool, and replace if necessary. Whipping hoses can cause serious injury.
- Disconnect the tool from the air supply when not in use, before changing accessories, setting the torque, or when making repairs.
- Do not exceed rated air pressure to increase the output of the tool. This could cause injury and shorten tool life.
- Do not assemble quick coupler on the tool. Vibration can cause breakage resulting in a whipping air hose. Instead, use quick couplers on the end of a short leader hose.
- When universal twist couplings are used, lock pins must be installed to prevent accidental hose disconnection.
- Air tools are not intended for use in explosive atmospheres and are not insulated for contact with electric power sources.



ELECTRICAL HAZARDS

- Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools and equipment. Unmodified plugs and matching outlets will reduce risk of electric shock.
- Avoid body contact with earthed or grounded metal surfaces. There is an increased risk of electric shock if your body is earthed or grounded.
- Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts. Damaged or entangled cords increase the risk of electric shock.
- Do not expose electric power tools and equipment to wet conditions.
- Do not operate power tools in explosive atmospheres. Power tools create sparks which may ignite dust, fumes or flammable liquids.
- Have electric power tools and equipment serviced by a qualified repair person using only identical replacement parts.



PROJECTILE HAZARDS

- Always wear impact resistant eye and face protection when involved with or near the operation or repair of tools.



BREATHING HAZARDS

- Proper breathing protection must be worn when working with materials, which produce airborne particles.



NOISE HAZARDS

- Hearing loss can result from prolonged exposure to excessive sound levels.
- Use hearing protection as recommended by your employer or Occupational Health and Safety Regulations.



VIBRATION HAZARDS

- Repetitive work motions, awkward positions, and exposure to vibration may be harmful to your hands and arms.
- If numbness, tingling, pain or whitening of the skin occurs, stop using tool and consult a physician.



ENTANGLEMENT HAZARDS

- To reduce the risk of injury from entanglement, do not wear loose clothing when using rotating accessories.



ADDITIONAL HAZARDS

- Slip/Trip/Fall is a major cause of serious injury or death. Beware of excessive hose/cord left on the walking or work surface.
- Operators and maintenance personnel must be physically fit to perform job tasks, and handle the bulk, weight and power of the tool.
- Deburring tools should be used to reduce the risk of cuts and abrasions due to burrs.
- Wear gloves to protect hands from sharp edges.

SAFETY INSTRUCTIONS

Specific Safety Instructions for Power Tool Groups

In addition to the General Safety Instructions, the following are safety instructions and warnings that apply to the safe operation of specific power tool groups.



COMPRESSION TOOLS

- To reduce the risk of injury always keep hands and fingers away from yoke and moving jaws, sets or dies. If possible, hold the tool body with both hands.
- Inspect the yoke daily for cracks. Injury may result if a cracked yoke fails during use.
- All yokes have a life limitation based on cycles and riveting force. This tool and its accessories must not be modified.



DRILLS & TAPPERS

- Keep away from rotating bit and chuck. You can become cut or burned if you come into contact with the drill bit or tap, chips/swarf, or work surface.
- Use intermittent drill feed pressure to avoid long shaved chips/swarf.
- The drill bit or tap can suddenly bind and cause the workpiece or tool to rotate, causing arm and shoulder injuries.
- It is recommended that side handles are used for operator comfort and safety on high torque drilling applications above 4Nm (3 lbft) on straight case tools and 10Nm (7.4 lbft) on pistol grip drills. Drills with a chuck capacity larger than 10mm (3/8") should always be used with a side handle.



PERCUSSIVE TOOLS

(Riveting Hammers, Air Scribe)

- All chisels, rivet sets and other associated accessories should be checked for cracks, excessive wear, or other physical damage before each use. Accessories that show signs of damage should be replaced immediately.
- Never use a tool without the proper accessory retainer.



IMPACT AND IMPULSE WRENCHES

- Never use hand sockets or accessories. Use only impact sockets and accessories in good condition. Sockets in poor condition reduce impact power and could also shatter, resulting in personal injury.
- When using a universal joint, never operate the tool off the work. It may run too fast and cause the joint to be thrown from the tool.
- Always use the simplest hook up possible. Long springy extension bars and adapters absorb impact power and could break loose resulting in personal injury. Instead, use deep sockets wherever possible.
- For tools using the pin and o-ring socket retainer, use the o-ring to securely retain the socket pin or use a one-piece retainer ring to retain the socket.
- Serious injury can result from overtorqued or under-torqued fasteners, which can break, or loosen and separate. Released assemblies can become projectiles. Assemblies requiring a specific torque must be checked using a torque meter.

NOTE: So-called 'click' torque wrenches do not check for potentially dangerous over-torqued conditions.



ANGLE WRENCHES

- Never use hand sockets or accessories Use only power drive sockets and accessories.
- To reduce the risk of injury, always support the handle securely in the direction opposite of the spindle rotation to minimize torque reaction.



ACCESSORIES

- Always use accessories of correct size and design for the tool. Tool and accessories must not be modified in any way.
- Never use a tool without the proper accessory retainer.
- Do not use a tool or attachment for a purpose not intended by the manufacturer.



OTHER TOOLS

(e.g. Screwdrivers, Shears, Saws, etc.)

- Specific instructions/warnings affecting this group of tools are contained in product-specific documents accompanying each product.



ABRASIVE TOOLS

- Before grinding, test grinding wheel by briefly running tool at full throttle. Be sure to use a barrier (such as under a heavy work table) to protect yourself from possible broken wheel parts.
- Never mount a grinding wheel on a sander.
- Never use a grinding wheel rated at a speed lower than the air grinder speed.
- All grinding wheels and polishing/sanding accessories should be checked for cracks or other damage before mounting and use.
- Always use the recommended wheel guard to prevent injury when performing grinding operations. If a guard has withstood wheel or disk breakage, it must be replaced.
- Position a guard between the grinding wheel or disc and the operator.
- Use barriers to protect others from fragments and grinding sparks.
- Make sure grinding wheels are mounted according manufacturer's specifications: always use correct mounting flanges.
- Never tamper with or remove a speed governor from a tool to make it run faster. Periodically check tool speed with a tachometer.



For more information about ergonomics please ask for the CP Ergosense booklet LT198 or visit www.cp.com and look in the Industrial Tools on line catalogue



www.cp.com



General Industrial Tools

Sales Contacts



Asia
Tel: (852) 2357 0963
Fax: (852) 2763 1875

Australia
Tel: (61) 2 9621 9900
Fax: (61) 2 9621 9966

Austria
Tel: (43) 1769 2934
Fax: (43) 1769 2935

Benelux
Tel: (32) 2 660 49 38
Fax: (32) 2 672 60 92

China
Tel: (86) 21 6215 3587
Fax: (86) 21 6258 7038

France
Tel: (33) 2 40 80 20 00
Fax: (33) 2 40 80 20 19

Germany
Tel: (49) 6181 4110
Fax: (49) 6181 411184

India
Tel: (91) 22 2570 89 11
Fax: (91) 22 2570 50 42

International
Tel: (44) 1442 344 300
Fax: (44) 1442 344 602

Italy
Tel: (39) 039 244 101
Fax: (39) 039 465 5025

New Zealand
Tel: (64) 94 15 8470
Fax: (64) 94 15 6808

Portugal
Tel: (351) 21 416 01 71
Fax: (351) 21 416 01 75


South Africa
Tel: (27) 11 821 9300
Fax: (27) 11 821 9359

South and Central America
Tel: (1) 803 817 7000
Fax: (1) 803 817 7257

Spain
Tel: (34) 91 590 3152
Fax: (34) 91 590 3161

United Kingdom and Ireland
Tel: (44) 1442 344 301
Fax: (44) 1442 344 600

USA & Canada
Tel: (1) 800 367 2442
Fax: (1) 800 232 6611

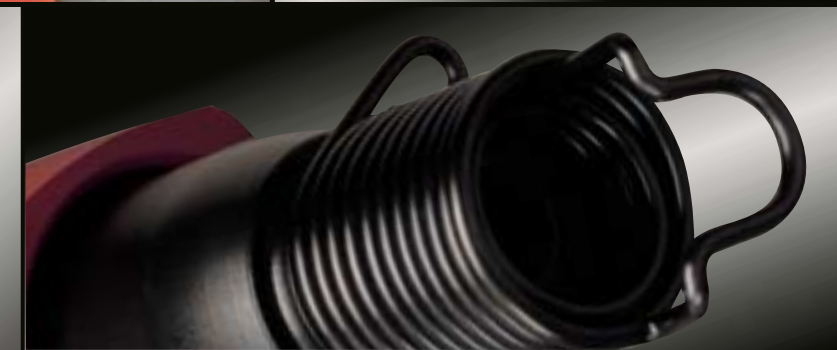

Part No 615 994 785 1 (English), 615 994 785 8 (American) - June 2004
© Copyright 2004 CP Desoutter HP2 7DR United Kingdom



Certificate No. FM28383
Desoutter Limited
ISO 9001 Registered

RediPower

The New Generation of Industrial Power Tools