


Random orbital sanders for abrasive discs

Ø 89mm (3.5") - Ø 127mm (5") - Ø 150mm (6")
210 Watts (0.3 hp) - 12000 rpm



SXR(.)35



SXR(.)35C



SXR(.)35V



SXR(.)50



SXR(.)50C



SXR(.)50V



SXR(.)60




SXR(.)60C

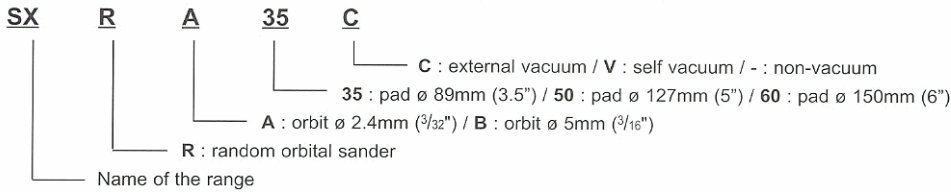


SXR(.)60V

Supplied kit



HOW TO SELECT YOUR SX SANDER — Eg: SXRA35C - SXR model / orbit Ø 2.4mm (3/32") / pad Ø 89mm (3.5") / with dust extraction



*Sanders equipped with PSA pad

Caution: comply with the speeds recommended by component and abrasive manufacturers

PAD SIZE		MODEL	PART NUMBER	MODEL	PART NUMBER	MODEL	PART NUMBER	WEIGHT		AIR CONSUMPTION AT MAX. OUTPUT		AIR INLET THREAD		HOSE INT Ø	
mm	in.							kg	lb.	l/s	cfm	in.	mm	in.	

RANDOM ORBITAL SANDERS, ORBIT Ø 5mm (3/16")

		Non-vacuum		External vacuum		Self vacuum									
Ø 89	3.5	SXRB35	615 170 209 0	SXRB35C	615 170 215 0	SXRB35V	615 170 212 0	0.8	1.7	8.0	16.6	1/4	6	1/4	
Ø 127	5	SXRB50	615 170 210 0	SXRB50C	615 170 216 0	SXRB50V	615 170 213 0	0.8	1.7	8.0	16.6	1/4	6	1/4	
Ø 127	5	SXRB50*	615 170 300 0					0.8	1.7	8.0	16.6	1/4	6	1/4	
Ø 150	6	SXRB60	615 170 211 0	SXRB60C	615 170 217 0	SXRB60V	615 170 214 0	0.8	1.7	8.0	16.6	1/4	6	1/4	
Ø 150	6	SXRB60*	615 170 317 0					0.8	1.7	8.0	16.6	1/4	6	1/4	



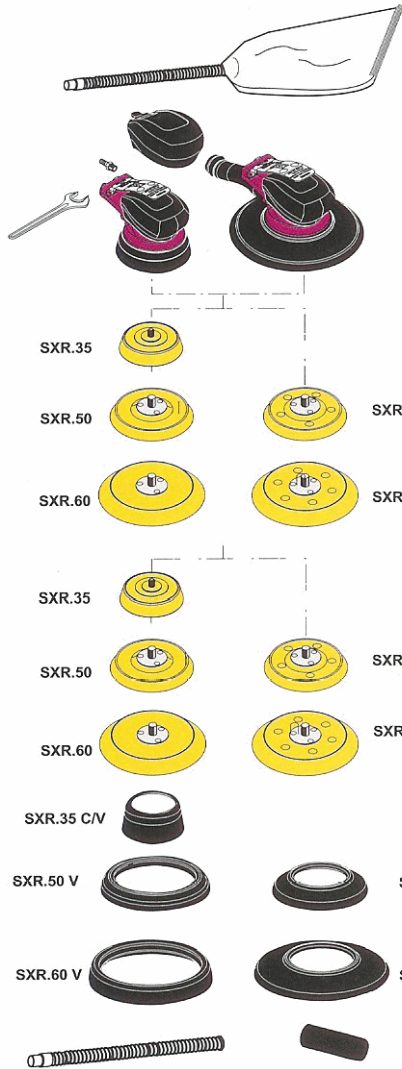

RANDOM ORBITAL SANDERS, ORBIT Ø 2.4mm (3/32")

		Non-vacuum		External vacuum		Self vacuum									
Ø 89	3.5	SXRA35	615 170 218 0	SXRA35C	615 170 224 0	SXRA35V	615 170 221 0	0.8	1.7	8.0	16.6	1/4	6	1/4	
Ø 127	5	SXRA50	615 170 219 0	SXRA50C	615 170 225 0	SXRA50V	615 170 222 0	0.8	1.7	8.0	16.6	1/4	6	1/4	
Ø 150	6	SXRA60	615 170 220 0	SXRA60C	615 170 226 0	SXRA60V	615 170 223 0	0.8	1.7	8.0	16.6	1/4	6	1/4	

<http://www.DesoutterTools.com>

Lou Zampini & Associates
37 Conifer Drive
North Providence, RI 02904-3020
1 800 353 4676
FAX 1 401 353 0113

Accessories

SXR. = 127 mm (5")

SXR.V/C = 186 mm (7.32")

SXR.C = 133 mm (5.24")


SXR.35. / SXR.50. / SXR.60.

ACCESSORIES INCLUDED

	PART NO.
• 1/4" air hose nipple for 6mm (1/4") ID hose	615 705 009 0
• Small grip (medium-size grip fitted on sander)	615 303 109 0
• Flat wrench 26mm across flats	615 801 078 0
• Complete dust extraction kit for SXR.A..V and SXR.B..V version	615 396 264 0

Pads:

Thread 5/16"-24 f

- Pad ø 89mm (3.5") - 80gr - SXR(.)35(.)
- Pad ø 125mm (5") - 100gr - SXR(.)50
- Pad ø 150mm (6") - 130gr - SXR(.)60

For scrim-backed abrasive

For scrim-backed abrasive (V) or (C) with holes

615 990 158 0	-
615 990 156 0	615 990 157 0
615 990 154 0	615 990 155 0

OPTIONAL ACCESSORIES

Pads:

Thread 5/16"-24 f

- Pad ø 89mm (3.5") - 80gr - SXR(.)35(.)
- Pad ø 125mm (5") - 100gr - SXR(.)50
- Pad ø 150mm (6") - 130gr - SXR(.)60

For self-adhesive abrasive

For self-adhesive abrasive (V) or (C) with holes

615 990 163 0	-
615 990 161 0	615 990 162 0
615 990 159 0	615 990 160 0

Vacuum skirts

- Vacuum skirt for SXR(.)35(.)
- Vacuum skirt for SXR(.)50C
- Vacuum skirt for SXR(.)60C
- Vacuum skirt for SXR(.)50V
- Vacuum skirt for SXR(.)60V

615 350 110 0
615 350 107 0
615 350 106 0
615 350 103 0
615 350 102 0

Adaptor

- Vacuum hose adaptor ø 25mm (1") / ø 32mm (1 1/4")
- Vacuum hose adaptor ø 25mm (1") / ø 28mm (1 1/8")

615 350 117 0
615 804 448 0

Hose

- Dust extraction hose ø 25mm (1") L = 1.5m (60")

615 396 263 0

PAD DIMENSIONS

