


# Screwdrivers – Shut Off – Push Start

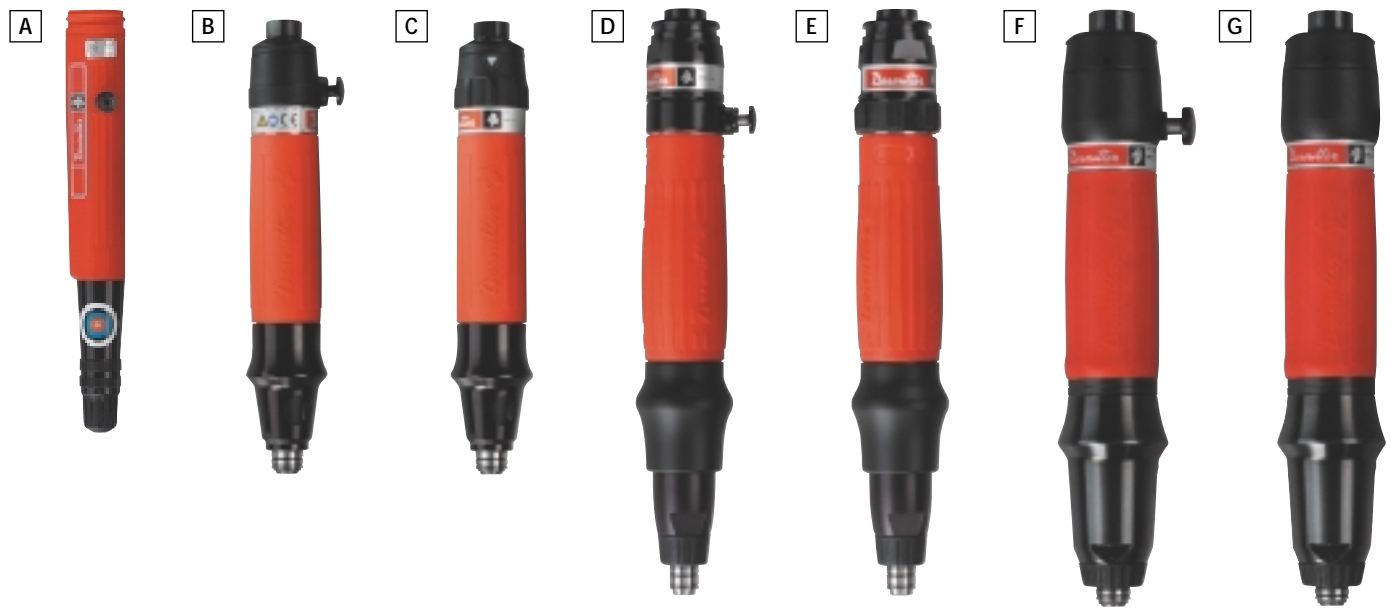

PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT <sup>(1)</sup>	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET <sup>(2)</sup>	SOUND LEVEL	VIBRATION
			r/min	hex	in lb	in lb	ins	lb	scfm	ins	NPT	dB(A)	ms <sup>-2</sup>
A	2A89-A-1300	1225434	1300	3mm	0.8-4.9	1.3-3.8	7.0	0.46	4.7	1/8"	M5	64	<2.5
A	2A89-A-700	1225514	700	3mm	0.8-6.6	1.3-3.8	7.0	0.46	4.7	1/8"	M5	64	<2.5
A	2A89-A-400	1225694	400	3mm	0.8-6.9	1.3-3.8	7.0	0.46	4.7	1/8"	M5	64	<2.5
A	2A89-A-1300	1223154	1300	1/4"	0.8-4.9	1.3-3.8	7.0	0.46	4.7	1/8"	M5	64	<2.5
A	2A89-A-700	1223234	700	1/4"	0.8-6.6	1.3-3.8	7.0	0.46	4.7	1/8"	M5	64	<2.5
A	2A89-A-400	1223314	400	1/4"	0.8-6.9	1.3-3.8	7.0	0.46	4.7	1/8"	M5	64	<2.5
B	SB011-AB1600-S4Q	1460644	1600	1/4"	3.5-10.0	3.5-10.0	7.8	0.92	8.7	1/4"	1/8"	69	<2.5
B	SB015-AB1100-S4Q	1460634	1100	1/4"	3.5-13.0	3.5-13.0	7.8	0.92	8.7	1/4"	1/8"	69	<2.5
B	SB025-AB750-S4Q	1460624	750	1/4"	2.5-22.0	2.5-22.0	7.8	0.92	8.7	1/4"	1/8"	69	<2.5
B	SB025-AB500-S4Q	1460684	500	1/4"	3.5-22.0	3.5-22.0	7.8	0.92	8.7	1/4"	1/8"	69	<2.5
C	SB011-AR1600-S4Q	1460524	1600	1/4"	3.5-10.0	3.5-10.0	7.8	0.92	8.7	1/4"	1/8"	69	<2.5
C	SB015-AR1100-S4Q	1460514	1100	1/4"	3.5-13.0	3.5-13.0	7.8	0.92	8.7	1/4"	1/8"	69	<2.5
C	SB025-AR750-S4Q	1460504	750	1/4"	2.5-22.0	2.5-22.0	7.8	0.92	8.7	1/4"	1/8"	69	<2.5
C	SB025-AR500-S4Q	1460564	500	1/4"	3.5-22.0	3.5-22.0	7.8	0.92	8.7	1/4"	1/8"	69	<2.5
D	SC021-AB2300-S4Q	1461854	2300	1/4"	3.5-18.6	3.5-8.0	9.8	1.34	13.8	1/4"	1/8"	75	<2.5
D	SC021-AB1600-S4Q	1461864	1600	1/4"	3.5-18.6	5.3-18.6	9.8	1.34	13.8	1/4"	1/8"	75	<2.5
D	SC043-AB1100-S4Q	1461874	1100	1/4"	3.5-38.0	8.0-38.0	9.8	1.34	13.8	1/4"	1/8"	75	<2.5
D	SC047-AB550-S4Q	1461884	550	1/4"	3.5-41.5	8.0-41.5	9.8	1.34	13.8	1/4"	1/8"	75	<2.5
E	SC021-A2300-S4Q	1456574	2300	1/4"	3.5-18.6	3.5-8.0	9.8	1.34	13.8	1/4"	1/8"	73	<2.5
E	SC021-A1600-S4Q	1456584	1600	1/4"	3.5-18.6	5.3-18.6	9.8	1.34	13.8	1/4"	1/8"	73	<2.5
E	SC043-A1100-S4Q	1456594	1100	1/4"	3.5-38.0	8.0-38.0	9.8	1.34	13.8	1/4"	1/8"	73	<2.5
E	SC047-A550-S4Q	1456604	550	1/4"	3.5-41.5	8.0-41.5	9.8	1.34	13.8	1/4"	1/8"	73	<2.5
F	SD023-AB3500-S4Q	1462834	3500	1/4"	8.9-20.4	8.9-20.4	8.9	1.61	18.4	3/8"	1/4"	73	<2.5
F	SD035-AB2200-S4Q	1462824	2200	1/4"	8.9-40.0	8.9-40.0	8.9	1.61	18.4	3/8"	1/4"	73	<2.5
F	SD055-AB1470-S4Q	1462814	1470	1/4"	17.7-48.7	17.7-48.7	10	1.96	18.4	3/8"	1/4"	73	<2.5
F	SD075-AB1100-S4Q	1462804	1100	1/4"	22.1-66.4	22.1-66.4	10	1.96	18.4	3/8"	1/4"	73	<2.5
F	SD100-AB820-S4Q	1462794	820	1/4"	31.0-88.5	31.0-88.5	10	1.96	18.4	3/8"	1/4"	73	<2.5
F	SD140-AB510-S4Q	1462784	510	1/4"	31.0-123.9	31.0-88.5	10	1.96	18.4	3/8"	1/4"	73	<2.5
F	SD160-AB320-S4Q	1462774	320	1/4"	31.0-141.6	31.0-88.5	10	1.96	18.4	3/8"	1/4"	73	<2.5
G	SD023-AR3500-S4Q	1462764	3500	1/4"	8.9-20.4	8.9-20.4	8.9	1.61	18.4	3/8"	1/4"	73	<2.5
G	SD035-AR2200-S4Q	1462754	2200	1/4"	8.9-40.0	8.9-40.0	8.9	1.61	18.4	3/8"	1/4"	73	<2.5
G	SD055-AR1470-S4Q	1462744	1470	1/4"	17.7-48.7	17.7-48.7	10	1.96	18.4	3/8"	1/4"	73	<2.5
G	SD075-AR1100-S4Q	1462734	1100	1/4"	22.1-66.4	22.1-66.4	10	1.96	18.4	3/8"	1/4"	73	<2.5
G	SD100-AR820-S4Q	1462724	820	1/4"	31.0-88.5	31.0-88.5	10	1.96	18.4	3/8"	1/4"	73	<2.5
G	SD140-AR510-S4Q	1462714	510	1/4"	31.0-123.9	31.0-88.5	10	1.96	18.4	3/8"	1/4"	73	<2.5
G	SD160-AR320-S4Q	1462704	320	1/4"	31.0-141.6	31.0-88.5	10	1.96	18.4	3/8"	1/4"	73	<2.5

<sup>(1)</sup> Types D to E, 5/16" hex bit holder optional. Types B to C, 1/4" double ended bit holder optional

<sup>(2)</sup> Types B to G, BSP optional

A side handle should be fitted for torques over 35 in lb (SD tools are supplied with a side handle as standard)

# Screwdrivers – Shut Off – Lever Start



PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT <sup>(1)</sup>	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET <sup>(2)</sup>	SOUND LEVEL	VIBRATION
			r/min	hex	in lb	in lb			scfm	ins	NPT		
A	SC021-L2300-S4Q	1456654	2300	1/4"	3.5-18.6	3.5-8.0	10.8	1.50	13.8	1/4"	1/8"	73	<2.5
A	SC021-L1600-S4Q	1456664	1600	1/4"	3.5-18.6	5.3-18.6	10.8	1.50	13.8	1/4"	1/8"	73	<2.5
A	SC043-L1100-S4Q	1456674	1100	1/4"	3.5-38.0	8.0-38.0	10.8	1.50	13.8	1/4"	1/8"	73	<2.5
A	SC047-L550-S4Q	1456684	550	1/4"	3.5-41.5	8.0-41.5	10.8	1.50	13.8	1/4"	1/8"	73	<2.5
B	SD023-LB3500-S4Q	1463094	3500	1/4"	8.9-20.4	8.9-20.4	9.9	1.67	18.4	3/8"	1/8"	73	<2.5
B	SD035-LB2200-S4Q	1463084	2200	1/4"	8.9-40.0	8.9-40.0	9.9	1.67	18.4	3/8"	1/8"	73	<2.5
B	SD055-LB1470-S4Q	1463074	1470	1/4"	17.7-48.7	17.7-48.7	10.9	2.02	18.4	3/8"	1/8"	73	<2.5
B	SD075-LB1100-S4Q	1463064	1100	1/4"	22.1-66.4	22.1-66.4	10.9	2.02	18.4	3/8"	1/8"	73	<2.5
B	SD100-LB820-S4Q	1463054	820	1/4"	31.0-88.5	31.0-88.5	10.9	2.02	18.4	3/8"	1/8"	73	<2.5
B	SD140-LB510-S4Q	1463044	510	1/4"	31.0-123.9	31.0-88.5	10.9	2.02	18.4	3/8"	1/8"	73	<2.5
B	SD160-LB320-S4Q	1463034	320	1/4"	31.0-141.6	31.0-88.5	10.9	2.02	18.4	3/8"	1/8"	73	<2.5
C	SD023-LR3500-S4Q	1463024	3500	1/4"	8.9-20.4	8.9-20.4	9.9	1.67	18.4	3/8"	1/8"	73	<2.5
C	SD035-LR2200-S4Q	1463014	2200	1/4"	8.9-40.0	8.9-40.0	9.9	1.67	18.4	3/8"	1/8"	73	<2.5
C	SD055-LR1470-S4Q	1463004	1470	1/4"	17.7-48.7	17.7-48.7	10.9	2.02	18.4	3/8"	1/8"	73	<2.5
C	SD075-LR1100-S4Q	1462994	1100	1/4"	22.1-66.4	22.1-66.4	10.9	2.02	18.4	3/8"	1/8"	73	<2.5
C	SD100-LR820-S4Q	1462984	820	1/4"	31.0-88.5	31.0-88.5	10.9	2.02	18.4	3/8"	1/8"	73	<2.5
C	SD140-LR510-S4Q	1462974	510	1/4"	31.0-123.9	31.0-88.5	10.9	2.02	18.4	3/8"	1/8"	73	<2.5
C	SD160-LR320-S4Q	1462964	320	1/4"	31.0-141.6	31.0-88.5	10.9	2.02	18.4	3/8"	1/8"	73	<2.5

<sup>(1)</sup> 5/16" hex bit holder optional for type A

<sup>(2)</sup> BSP optional

A side handle should be fitted for torques over 35 in lb (SD tools are supplied with a side handle as standard)

**Lou Zampini & Associates**  
 2 Douglas Pike, Rt. 7  
 Smithfield, RI 02917  
 1 800 353 4676  
 FAX 1 401 679 0165



# Screwdrivers – Shut Off – Pistol Grip



## PUSH AND TRIGGER START

PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET <sup>(2)</sup>	SOUND LEVEL	VIBRATION
			r/min	hex	in lb	in lb	ins	lb	scfm	ins	NPT	dB(A)	ms <sup>-2</sup>
A	SBP021-T2300-S4Q	1462144	2300	1/4"	3.5-18.6	3.5-18.6	7.2	1.80	13.8	1/4"	1/8"	73	<2.5
A	SBP021-T1600-S4Q	1462154	1600	1/4"	3.5-18.6	3.5-18.6	7.2	1.80	13.8	1/4"	1/8"	73	<2.5
A	SBP043-T1100-S4Q	1462164	1100	1/4"	3.5-38.0	15.9-38.0	7.2	1.80	13.8	1/4"	1/8"	73	<2.5
A	SBP047-T550-S4Q	1462174	550	1/4"	3.5-41.5	15.9-41.5	7.2	1.80	13.8	1/4"	1/8"	73	<2.5

## TRIGGER START

PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT <sup>(1)</sup>	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET <sup>(2)</sup>	SOUND LEVEL	VIBRATION
			r/min	hex	in lb	in lb	ins	lb	scfm	ins	NPT	dB(A)	ms <sup>-2</sup>
B	SCP021-T2300-S4Q	1456734	2300	1/4"	3.5-18.6	3.5-8.0	9.0	1.89	13.8	1/4"	1/8"	73	<2.5
B	SCP021-T1600-S4Q	1456744	1600	1/4"	3.5-18.6	5.3-18.6	9.0	1.89	13.8	1/4"	1/8"	73	<2.5
B	SCP043-T1100-S4Q	1456754	1100	1/4"	3.5-38.0	8.0-38.0	9.0	1.89	13.8	1/4"	1/8"	73	<2.5
B	SCP047-T550-S4Q	1456764	550	1/4"	3.5-41.5	8.0-41.5	9.0	1.89	13.8	1/4"	1/8"	73	<2.5
C	SCPT021-A2300-S4Q	1458974	2300	1/4"	3.5-18.6	3.5-8.0	9.1	1.89	13.8	1/4"	1/8"	73	<2.5
C	SCPT021-A1600-S4Q	1458934	1600	1/4"	3.5-18.6	5.3-18.6	9.1	1.89	13.8	1/4"	1/8"	73	<2.5
C	SCPT043-A1100-S4Q	1458894	1100	1/4"	3.5-38.0	8.0-38.0	9.1	1.89	13.8	1/4"	1/8"	73	<2.5
C	SCPT047-A550-S4Q	1458854	550	1/4"	3.5-41.5	8.0-41.5	9.1	1.89	13.8	1/4"	1/8"	73	<2.5
D	2D89-PX-2200	1455874	2200	1/4"	8.0-30.9	8.0-30.9	8.9	2.64	17.0	3/8"	1/4"	72	<2.5
D	2D89-PX-1500	1455854	1500	1/4"	8.0-39.8	8.0-30.9	9.4	2.64	17.0	3/8"	1/4"	72	<2.5
D	2D89-PX-850	1455834	850	1/4"	13.2-60.0	13.2-49.5	9.4	2.64	17.0	3/8"	1/4"	72	<2.5
D	2D89-PX-540	1455814	540	1/4"	13.2-94.7	17.7-94.7	9.4	2.64	17.0	3/8"	1/4"	72	<2.5
D	2D89-PX-340	1455794	340	1/4"	31.8-146.9	31.8-146.9	9.9	2.64	17.0	3/8"	1/4"	72	<2.5
E	2F89-PX-2200	1336914	2200	1/4"	16.8-52.2	8.0-30.9	8.8	2.86	19.9	3/8"	1/4"	82	<2.5
E	2F89-PX-1100	1337144	1100	1/4"	15.9-79.6	15.9-47.7	9.6	3.08	19.9	3/8"	1/4"	82	<2.5
E	2F89-PX-650	1337724	650	1/4"	14.1-108.8	14.1-47.7	9.6	3.08	19.9	3/8"	1/4"	82	<2.5
E	2F89-PX-450	1337984	450	1/4"	14.1-105.3	14.1-47.7	9.6	3.08	19.9	3/8"	1/4"	82	<2.5
E	2F89-PX-750	1337304	750	1/4"	14.1-123.9	14.1-123.9	10.1	3.30	19.9	3/8"	1/4"	82	<2.5
E	2F89-PX-500	1337564	500	1/4"	22.1-141.6	22.1-141.6	10.1	3.30	19.9	3/8"	1/4"	82	<2.5

<sup>(1)</sup> Types B, C, D and E, 5/16" hex bit holder optional

<sup>(2)</sup> BSP optional

<sup>(3)</sup> Types B and C are available with a steel nose

A side handle should be fitted for torques over 88 in lb

**Lou Zampini & Associates**

2 Douglas Pike, Rt. 7

Smithfield, RI 02917

1 800 353 4676

FAX 1 401 679 0165