


Screwdrivers – Non Shut Off – Push and Lever Start

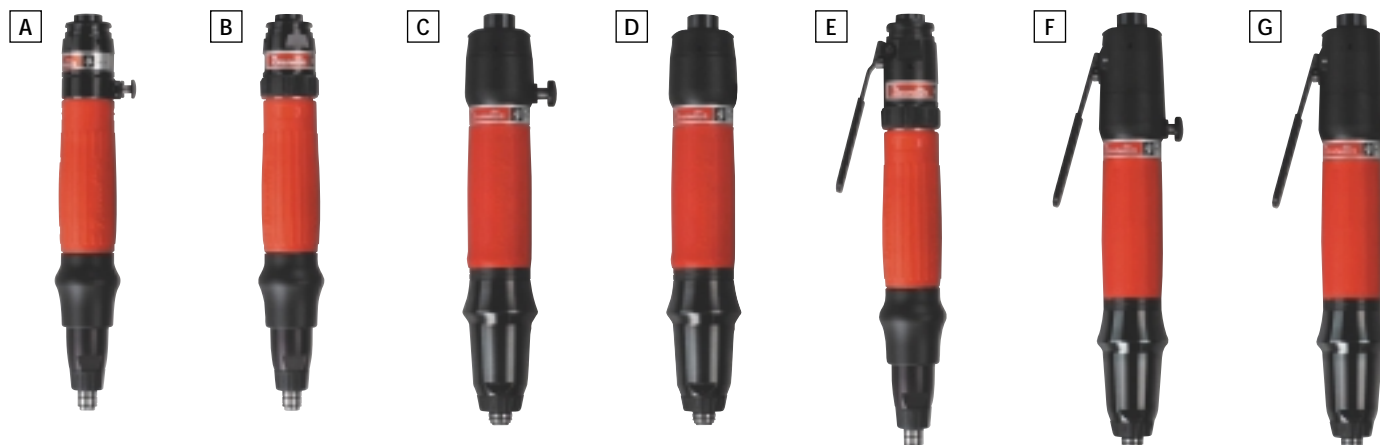

PUSH START

| PICTURE REF | TOOL TYPE | PART NUMBER | FREE SPEED | OUTPUT ⁽¹⁾ | TORQUE RANGE | FITTED SPRING | LENGTH | WEIGHT | AIR FLOW | AIR HOSE BORE | AIR INLET ⁽²⁾ | SOUND LEVEL | VIBRATION |
|-------------|------------------|-------------|------------|-----------------------|--------------|---------------|--------|--------|----------|---------------|--------------------------|-------------|------------------|
| | | | r/min | hex | in lb | in lb | ins | lb | scfm | ins | NPT | dB(A) | ms ⁻² |
| A | SC024-AB2300-R4Q | 1461894 | 2300 | 1/4" | 4.4-21.2 | 4.4-15.9 | 9.8 | 1.34 | 13.8 | 1/4" | 1/8" | 75 | 2-5 |
| A | SC022-AB1600-R4Q | 1461904 | 1600 | 1/4" | 4.4-19.4 | 7.1-19.4 | 9.8 | 1.34 | 13.8 | 1/4" | 1/8" | 75 | 3-9 |
| A | SC044-AB1100-R4Q | 1461914 | 1100 | 1/4" | 3.5-38.9 | 11.5-38.9 | 9.8 | 1.34 | 13.8 | 1/4" | 1/8" | 75 | 9-35 |
| A | SC044-AB550-R4Q | 1461924 | 550 | 1/4" | 3.5-38.9 | 8.9-38.9 | 9.8 | 1.34 | 13.8 | 1/4" | 1/8" | 75 | 10-29 |
| B | SC024-A2300-R4Q | 1456614 | 2300 | 1/4" | 4.4-21.2 | 4.4-15.9 | 9.8 | 1.34 | 13.8 | 1/4" | 1/8" | 73 | 2-5 |
| B | SC022-A1600-R4Q | 1456624 | 1600 | 1/4" | 4.4-19.4 | 7.1-19.4 | 9.8 | 1.34 | 13.8 | 1/4" | 1/8" | 73 | 3-9 |
| B | SC044-A1100-R4Q | 1456634 | 1100 | 1/4" | 3.5-38.9 | 11.5-38.9 | 9.8 | 1.34 | 13.8 | 1/4" | 1/8" | 73 | 9-35 |
| B | SC044-A550-R4Q | 1456644 | 550 | 1/4" | 3.5-38.9 | 8.9-38.9 | 9.8 | 1.34 | 13.8 | 1/4" | 1/8" | 73 | 10-29 |
| C | SD023-AB3500-R4Q | 1462954 | 3500 | 1/4" | 8.9-20.3 | 8.9-20.3 | 8.9 | 1.61 | 18.4 | 3/8" | 1/4" | 73 | TBA |
| C | SD035-AB2200-R4Q | 1462944 | 2200 | 1/4" | 8.9-31.0 | 8.9-31.0 | 8.9 | 1.61 | 18.4 | 3/8" | 1/4" | 73 | TBA |
| C | SD055-AB1470-R4Q | 1462934 | 1470 | 1/4" | 17.7-48.6 | 17.7-48.6 | 10 | 1.96 | 18.4 | 3/8" | 1/4" | 73 | 16.1 |
| C | SD075-AB1100-R4Q | 1462924 | 1100 | 1/4" | 22.1-66.3 | 22.1-66.3 | 10 | 1.96 | 18.4 | 3/8" | 1/4" | 73 | 14.9 |
| C | SD100-AB820-R4Q | 1462914 | 820 | 1/4" | 31.0-88.5 | 31.0-88.5 | 10 | 1.96 | 18.4 | 3/8" | 1/4" | 73 | TBA |
| C | SD140-AB510-R4Q | 1462904 | 510 | 1/4" | 31.0-88.5 | 31.0-88.5 | 10 | 1.96 | 18.4 | 3/8" | 1/4" | 73 | 14.7 |
| D | SD023-AR3500-R4Q | 1462894 | 3500 | 1/4" | 8.9-20.3 | 8.9-20.3 | 8.9 | 1.61 | 18.4 | 3/8" | 1/4" | 73 | TBA |
| D | SD035-AR2200-R4Q | 1462884 | 2200 | 1/4" | 8.9-31.0 | 8.9-31.0 | 8.9 | 1.61 | 18.4 | 3/8" | 1/4" | 73 | TBA |
| D | SD055-AR1470-R4Q | 1462874 | 1470 | 1/4" | 17.7-48.6 | 17.7-48.6 | 10 | 1.96 | 18.4 | 3/8" | 1/4" | 73 | 16.1 |
| D | SD075-AR1100-R4Q | 1462864 | 1100 | 1/4" | 22.1-66.3 | 22.1-66.3 | 10 | 1.96 | 18.4 | 3/8" | 1/4" | 73 | 14.9 |
| D | SD100-AR820-R4Q | 1462854 | 820 | 1/4" | 31.0-88.5 | 31.0-88.5 | 10 | 1.96 | 18.4 | 3/8" | 1/4" | 73 | TBA |
| D | SD140-AR510-R4Q | 1462844 | 510 | 1/4" | 31.0-88.5 | 31.0-88.5 | 10 | 1.96 | 18.4 | 3/8" | 1/4" | 73 | 14.7 |

LEVER START

| PICTURE REF | TOOL TYPE | PART NUMBER | FREE SPEED | OUTPUT ⁽¹⁾ | TORQUE RANGE | FITTED SPRING | LENGTH | WEIGHT | AIR FLOW | AIR HOSE BORE | AIR INLET ⁽²⁾ | SOUND LEVEL | VIBRATION |
|-------------|------------------|-------------|------------|-----------------------|--------------|---------------|--------|--------|----------|---------------|--------------------------|-------------|------------------|
| | | | r/min | hex | in lb | in lb | ins | lb | scfm | ins | NPT | dB(A) | ms ⁻² |
| E | SC024-L2300-R4Q | 1456694 | 2300 | 1/4" | 4.4-21.2 | 4.4-15.9 | 9.8 | 1.34 | 13.8 | 1/4" | 1/8" | 75 | 2-5 |
| E | SC022-L1600-R4Q | 1456704 | 1600 | 1/4" | 4.4-19.4 | 7.1-19.4 | 9.8 | 1.34 | 13.8 | 1/4" | 1/8" | 75 | 3-9 |
| E | SC044-L1100-R4Q | 1456714 | 1100 | 1/4" | 3.5-38.9 | 11.5-38.9 | 9.8 | 1.34 | 13.8 | 1/4" | 1/8" | 75 | 9-35 |
| E | SC044-L550-R4Q | 1456724 | 550 | 1/4" | 3.5-38.9 | 8.9-38.9 | 9.8 | 1.34 | 13.8 | 1/4" | 1/8" | 75 | 10-29 |
| F | SD023-LB3500-R4Q | 1463214 | 3500 | 1/4" | 8.9-20.3 | 8.9-20.3 | 9.9 | 1.67 | 18.4 | 3/8" | 1/4" | 73 | TBA |
| F | SD035-LB2200-R4Q | 1463204 | 2200 | 1/4" | 8.9-31.0 | 8.9-31.0 | 9.9 | 1.67 | 18.4 | 3/8" | 1/4" | 73 | TBA |
| F | SD055-LB1470-R4Q | 1463194 | 1470 | 1/4" | 17.7-48.6 | 17.7-48.6 | 10.9 | 2.02 | 18.4 | 3/8" | 1/4" | 73 | 16.1 |
| F | SD075-LB1100-R4Q | 1463184 | 1100 | 1/4" | 22.1-66.3 | 22.1-66.3 | 10.9 | 2.02 | 18.4 | 3/8" | 1/4" | 73 | 14.9 |
| F | SD100-LB820-R4Q | 1463174 | 820 | 1/4" | 31.0-88.5 | 31.0-88.5 | 10.9 | 2.02 | 18.4 | 3/8" | 1/4" | 73 | TBA |
| F | SD140-LB510-R4Q | 1463164 | 510 | 1/4" | 31.0-88.5 | 31.0-88.5 | 10.9 | 2.02 | 18.4 | 3/8" | 1/4" | 73 | 14.7 |
| G | SD023-LR3500-R4Q | 1463154 | 3500 | 1/4" | 8.9-20.3 | 8.9-20.3 | 9.9 | 1.67 | 18.4 | 3/8" | 1/4" | 73 | TBA |
| G | SD035-LR2200-R4Q | 1463144 | 2200 | 1/4" | 8.9-31.0 | 8.9-31.0 | 9.9 | 1.67 | 18.4 | 3/8" | 1/4" | 73 | TBA |
| G | SD055-LR1470-R4Q | 1463134 | 1470 | 1/4" | 17.7-48.6 | 17.7-48.6 | 10.9 | 2.02 | 18.4 | 3/8" | 1/4" | 73 | 16.1 |
| G | SD075-LR1100-R4Q | 1463124 | 1100 | 1/4" | 22.1-66.3 | 22.1-66.3 | 10.9 | 2.02 | 18.4 | 3/8" | 1/4" | 73 | 14.9 |
| G | SD100-LR820-R4Q | 1463114 | 820 | 1/4" | 31.0-88.5 | 31.0-88.5 | 10.9 | 2.02 | 18.4 | 3/8" | 1/4" | 73 | TBA |
| G | SD140-LR510-R4Q | 1463104 | 510 | 1/4" | 31.0-88.5 | 31.0-88.5 | 10.9 | 2.02 | 18.4 | 3/8" | 1/4" | 73 | 14.7 |

⁽¹⁾ Types A, B and F, 5/16" hex bit optional

⁽²⁾ BSP optional

A side handle should be fitted for torques over 35 in lb (SD tools are supplied with a side handle as standard)

Screwdrivers – Non Shut Off – Pistol Grip



PUSH AND TRIGGER START

| PICTURE REF | TOOL TYPE | PART NUMBER | FREE SPEED | OUTPUT ⁽¹⁾ | TORQUE RANGE | FITTED SPRING | LENGTH | WEIGHT | AIR FLOW | AIR HOSE BORE | AIR INLET ⁽²⁾ | SOUND LEVEL | VIBRATION |
|-------------|------------------|-------------|------------|-----------------------|--------------|---------------|--------|--------|----------|---------------|--------------------------|-------------|-----------|
| | | | r/min | hex | in lb | in lb | | | | | | | |
| A | SBP024-T2300-R4Q | 1462184 | 2300 | 1/4" | 4.4-21.2 | 4.4-21.2 | 7.2 | 1.80 | 13.8 | 1/4" | 1/8" | 73 | 0.9-2.5 |
| A | SBP022-T1600-R4Q | 1462194 | 1600 | 1/4" | 4.4-19.4 | 4.4-19.4 | 7.2 | 1.80 | 13.8 | 1/4" | 1/8" | 73 | 1.8-3.2 |
| A | SBP044-T1100-R4Q | 1462204 | 1100 | 1/4" | 3.5-38.9 | 15.9-38.9 | 7.2 | 1.80 | 13.8 | 1/4" | 1/8" | 73 | 2.3-3.9 |
| A | SBP044-T550-R4Q | 1462214 | 550 | 1/4" | 3.5-38.9 | 15.9-38.9 | 7.2 | 1.80 | 13.8 | 1/4" | 1/8" | 73 | 1.7-4.7 |

TRIGGER START

| PICTURE REF | TOOL TYPE | PART NUMBER | FREE SPEED | OUTPUT ⁽¹⁾ | TORQUE RANGE | FITTED SPRING | LENGTH | WEIGHT | AIR FLOW | AIR HOSE BORE | AIR INLET ⁽²⁾ | SOUND LEVEL | VIBRATION |
|-------------|-------------------|-------------|------------|-----------------------|--------------|---------------|--------|--------|----------|---------------|--------------------------|-------------|-----------|
| | | | r/min | hex | in lb | in lb | | | | | | | |
| B | SCP024-T2300-R4Q | 1456774 | 2300 | 1/4" | 4.4-21.2 | 4.4-15.9 | 9.0 | 1.89 | 13.8 | 1/4" | 1/8" | 73 | 0.9-2.5 |
| B | SCP022-T1600-R4Q | 1456784 | 1600 | 1/4" | 4.4-19.4 | 7.1-19.4 | 9.0 | 1.89 | 13.8 | 1/4" | 1/8" | 73 | 1.8-3.2 |
| B | SCP044-T1100-R4Q | 1456794 | 1100 | 1/4" | 3.5-38.9 | 11.5-38.9 | 9.0 | 1.89 | 13.8 | 1/4" | 1/8" | 73 | 2.3-3.9 |
| B | SCP044-T550-R4Q | 1456804 | 550 | 1/4" | 3.5-38.9 | 8.9-38.9 | 9.0 | 1.89 | 13.8 | 1/4" | 1/8" | 73 | 1.7-4.7 |
| C | SCPT024-A2300-R4Q | 1458994 | 2300 | 1/4" | 4.4-21.2 | 4.4-15.9 | 9.1 | 1.89 | 13.8 | 1/4" | 1/8" | 73 | 0.9-2.5 |
| C | SCPT022-A1600-R4Q | 1458954 | 1600 | 1/4" | 4.4-19.4 | 7.1-19.4 | 9.1 | 1.89 | 13.8 | 1/4" | 1/8" | 73 | 1.8-3.2 |
| C | SCPT044-A1100-R4Q | 1458914 | 1100 | 1/4" | 3.5-38.9 | 11.5-38.9 | 9.1 | 1.89 | 13.8 | 1/4" | 1/8" | 73 | 2.3-3.9 |
| C | SCPT044-A550-R4Q | 1458874 | 550 | 1/4" | 3.5-38.9 | 8.9-38.9 | 9.1 | 1.89 | 13.8 | 1/4" | 1/8" | 73 | 1.7-4.7 |
| D | 2D8-PX-2200 | 1455574 | 2200 | 1/4" | 5.3-31.8 | 5.3-13.3 | 7.8 | 2.42 | 17.0 | 3/8" | 1/4" | 72 | 1.4-2.6 |
| D | 2D8-PX-1500 | 1455554 | 1500 | 1/4" | 13.3-60.1 | 13.3-39.8 | 8.3 | 2.42 | 17.0 | 3/8" | 1/4" | 72 | 3.1-3.8 |
| D | 2D8-PX-850 | 1455534 | 850 | 1/4" | 13.3-60.1 | 13.3-39.8 | 8.3 | 2.42 | 17.0 | 3/8" | 1/4" | 72 | 2.5-3.4 |
| D | 2D8-PX-540 | 1455514 | 540 | 1/4" | 13.3-88.5 | 31.9-60.1 | 8.3 | 2.42 | 17.0 | 3/8" | 1/4" | 72 | 3.7-4.7 |
| D | 2D8-PX-340 | 1455494 | 340 | 1/4" | 13.3-88.5 | 31.9-60.1 | 8.3 | 2.42 | 17.0 | 3/8" | 1/4" | 72 | <2.5 |
| E | 2F8-PX-2000 | 1236884 | 2000 | 1/4" | 5.3-39.8 | 13.3-39.8 | 7.7 | 2.86 | 19.9 | 3/8" | 1/4" | 82 | <2.5 |
| E | 2F8-PX-1100 | 1236624 | 1100 | 1/4" | 13.3-55.7 | 13.3-39.8 | 8.5 | 3.30 | 19.9 | 3/8" | 1/4" | 82 | <2.5 |
| E | 2F8-PX-650 | 1235654 | 650 | 1/4" | 13.3-70.8 | 31.8-70.8 | 8.5 | 3.30 | 19.9 | 3/8" | 1/4" | 82 | <2.5 |
| E | 2F8-PX-450 | 1235814 | 450 | 1/4" | 31.9-88.5 | 31.9-70.8 | 8.5 | 3.30 | 19.9 | 3/8" | 1/4" | 82 | 2.1-2.8 |
| E | 2F8-PX-750 | 1236384 | 750 | 1/4" | 79.6-132.7 | 79.6-132.7 | 10.1 | 3.96 | 19.9 | 3/8" | 1/4" | 82 | 5.3-6.2 |
| E | 2F8-PX-500 | 1236044 | 500 | 1/4" | 88.5-132.7 | 88.5-132.7 | 10.1 | 3.96 | 19.9 | 3/8" | 1/4" | 82 | 6.0-9.2 |

⁽¹⁾ Types B, C, D and E, 5/16" hex bit holder optional

⁽²⁾ BSP optional

⁽³⁾ Types B and C are available with a steel nose

A side handle should be fitted for torques over 88 in lb

Lou Zampini & Associates

2 Douglas Pike, Rt. 7

Smithfield, RI 02917

1 800 353 4676

FAX 1 401 679 0165

