



AIR TOOL GUIDE

Proudly Distributed By

Impact Wrenches

Drills

Sanders

Automotive Tools

Construction Tools

Pumps

Compressors and more...

IMPACT WRENCH

3/8" Impact Wrench

212A

- Compact 3/8" Drive
- Max Torque: 150 ft-lb
- Handle Exhaust



216B

- Palm Grip 3/8" Drive
- Max Torque: 200 ft-lb
- Butterfly fwd/rev action
- Recessed Regulator Dial
- Handle Exhaust



2115TiMAX

- Ultimate Compact 3/8" Drive
- Max Torque: 300 ft-lb
- Adjustable Dial Power
- Handle Exhaust
- Lightweight Composite Body



1/2" Impact Wrench

2125QTiMAX

- Ultimate Compact 1/2" Drive
- Max Torque: 332 ft-lb
- Adjustable Dial Power
- Handle Exhaust
- Lightweight Composite Body



131S-EA & 131S-2-EA

- Max Torque: 450 ft-lb (rev)
- Pressure Feed Lubrication
- Adjustable Power Regulator
- Handle Exhaust
- 2" Extended Anvil available



231C-AP

- Max Torque: 600 ft-lb (rev)
- Pressure Feed Lubrication
- Adjustable Power Regulator
- Front Exhaust



2130AP & 2130AP-2

- 1/2" Drive
- Max Torque: 550 ft-lb
- Adjustable Dial Power
- Handle Exhaust
- 2" Extended Anvil Model available
- Lightweight Composite Body



2131C

- 1/2" Drive
- Max Torque: 600 ft-lb
- Adjustable Dial Power
- Handle Exhaust
- Lightweight Composite Body



2135Qi

- 1/2" Drive
- Max Torque: 700 ft-lb
- Seven Vane Motor
- Lightweight Composite Body
- Quite Tool Technology 86 dbA (pressure)



2135QTiMAX

- Ultimate 1/2" Drive
- Max Torque: 780 ft-lb
- Adjustable Dial Power
- Handle Exhaust
- Lightweight Composite Body
- Quite Tool Technology 86dbA (pressure)



2135TiMAX & 2135Ti2MAX

- Ultimate 1/2" Drive
- Max Torque: 780 ft-lb
- Adjustable Dial Power
- Handle Exhaust
- Lightweight Composite Body
- 2135Ti-2MAX 2" Anvil



3/4" Impact Wrench

261 & 261-6

- 3/4" Drive
- Max Torque: 1100 ft-lb
- Jumbo Hammer Power
- Adjustable Power
- Handle Exhaust
- Pressure Feed Lubrication
- Available with standard 3" or 6" Extension Anvil



2141

- 3/4" Drive
- Max Torque: 1200 ft-lb
- Weighs just 3.2kg
- Handle Exhaust
- Only 208mm Long
- Lightweight Composite Body
- New Silenced Model Available 2141S



259

- 3/4" Drive
- Max Torque: 1050 ft-lb
- Weighs 4.0kg
- Silenced Handle Exhaust
- Two Power Settings
- Rocking Dog Impact Mechanism works well on a wide range of air pressures



2925P1Ti

- 3/4" Drive
- Max Torque: 1450 ft-lb
- Twin Hammer Power
- Adjustable Dial Power
- Handle Exhaust
- Corrosion Protector



Model	Drive	Free Speed	Maximum Torque		Recommended Torque		Weight	Length	Air Inlet	Min Hose Size	Average Air Consumption	
			Nm	ft-lb	Nm	ft-lb					lpm	cfm
Pistol Grip	in	rpm	Nm	ft-lb	Nm	ft-lb	kg	mm	in	in	lpm	cfm
212A	3/8	10,200	205	150	27-170	20-125	1.66	203	1/4	3/8	71	2.5
216B	3/8	8,500	271	200	20-217	15-160	1.27	196	1/4	3/8	84	3
2115TiMAX	3/8	15,000	407	300	34-312	25-230	1.12	151	1/4	3/8	113	4
2125QTiMAX	1/2	15,000	450	332	34-340	25-251	1.14	155	1/4	3/8	113	4
131S-EA	1/2	8000	610	450	34-407	25-300	2.63	185	1/4	3/8	120	4.2
131S-2-EA	1/2	8000	610	450	34-407	25-300	2.80	235	1/4	3/8	120	4.2
231C-AP	1/2	8000	813	600	34-475	25-350	2.63	185	1/4	3/8	120	4.2
2130AP	1/2	9500	745	550	68-680	50-500	1.90	184	1/4	3/8	125	4.4
2130AP-2	1/2	9500	745	550	68-680	50-500	2.05	235	1/4	3/8	125	4.4
2131C	1/2	9500	816	600	68/544	50-400	2.00	180	1/4	3/8	136	4.8
2135Qi	1/2	9500	949	700	68-881	50-650	1.93	187	1/4	3/8	142	5
2135QTiMAX	1/2	9800	1054	780	68-880	50-650	1.83	186	1/4	3/8	142	5
2135TiMAX	1/2	9800	1054	780	68-880	50-650	1.79	187	1/4	3/8	142	5
2135Ti-2MAX	1/2	9800	1054	780	68-880	50-650	1.99	241	1/4	3/8	142	5
259	3/4	6000	1424	1050	272-1085	200-800	4.00	218	3/8	3/8	227	8
261	3/4	5500	1491	1100	272-1224	200-900	5.62	224	3/8	1/2	270	9.5
261-6	3/4	5500	1491	1100	272-1224	200-900	6.21	376	3/8	1/2	270	9.5
2141	3/4	8000	1627	1200	272-1224	200-900	3.20	208	3/8	1/2	270	9.5
2141S	3/4	8000	1627	1200	272-1224	200-900	3.20	208	3/8	1/2	270	9.5
2925P1Ti	3/4	5200	1966 (f)	1450 (f)	476-1496 (f)	350-1100 (f)	5.39	225	3/8	1/2	368	13

IMPACT WRENCH

1" Impact Wrench

2150

- 1" Drive
- Max Torque: 1200 ft-lb
- Weighs just 3.4kg
- Handle Exhaust
- Only 208mm Long



2925P3Ti

- 1" Drive
- Max Torque: 1450 ft-lb
- 4 Positional Power Dial
- Twin Hammer Power
- Handle Exhaust
- Corrosion Protection



Titanium

2925B2Ti

- 1" Drive
- Max Torque: 1450 ft-lb
- Twin Hammer Power
- 7 Vane Motor
- 4 Positional Power Dial
- Corrosion Protection



Titanium

631L

- 1" Drive & 8" Anvil
- D Handle Outside Trigger
- 4 Position Power Regulator
- High Torque: 3,172 ft-lb



285B & 285B-6

- 1" Drive
- Max Torque: 1450 ft-lb
- Side Handle
- 4 Position Power Regulator
- Angled Down Exhaust
- 360 degree Swivel Inlet



2940P2

- Pistol Grip
- Max Torque: 2000 ft-lb
- 1" Drive
- Twin Hammer



2940B2

- 1" Drive
- Max Torque: 2000 ft-lb
- Twin Hammer
- Pressure Feed Lubrication
- Power IR Industrial Grade Tool
- For the toughest 1" Drive applications



631S

- 1" Drive
- D Handle Outside Trigger
- 4 Position Power Regulator
- High Torque: 3,172 ft-lbs



This range is equivalent to the heaviest duty available from most other air tool manufacturers!

PERFECT FOR TRUCK REPAIRS & CONSTRUCTION WORK

3942B2Ti

- Twin Hammer
- 1" Drive
- 3940B2Ti Max: 2500 ft-lb
- 3942B2Ti Max: 2750 ft-lb
- Feature the strongest, longest life mechanism in the world*



Titanium

1 1/2" Impact Wrench

2950B7

- 1-1/2" Sq Drive Impact
- Max Torque: 3,000 ft-lb
- Twin Hammer
- Pressure Feed Lubrication



3955B2Ti

- 1-1/2" Drive Impact
- Titanium Hammer Case
- Max Torque: 5,000 ft-lb
- Weighs just 15.7kg
- 7 Vane Motor
- Bronze Endplates



Titanium

Model	Drive		Free Speed	Maximum Torque		Recommended Torque		Weight	Length	Air Inlet	Min Hose Size		Average Air Consumption	
	in	rpm		Nm	ft-lb	Nm	ft-lb				in	in	lpm	cfm
Pistol Grip														
2150	1	8000	1627	1200	274-1224	200-900	3.40	208	3/8	1/2	270	9.5		
2925P3Ti	1	5200	1966 (f)	1450 (f)	476-1496 (f)	350-1100 (f)	5.40	225	3/8	1/2	368	13		
2940P2	1	4000	2710	2000	1360-2169	1000-1600	10.40	251	1/2	3/4	368	13		
D-Handle														
2925B2Ti	1	6500	2169 (f)	1600 (f)	475-1900 (f)	350-1400 (f)	6.35	314	3/8	1/2	368	13		
285B	1	5000	2000	1475	136-1220	100-900	11.16	335	1/2	1/2	283	10		
285B-6	1	5000	2000	1475	136-1220	100-900	12.61	511	1/2	1/2	283	10		
631L	1	3500	4300	3172	271-3390	200-2500	16.60	624	1/2	1/2	427	15		
631S	1	3500	4300	3172	271-3390	200-2500	14.50	432	1/2	1/2	427	15		
2940B2	1	5000	2710	2000	1360-2170	1000-1600	9.98	311	1/2	3/4	368	13		
3942B2Ti	1	5000	4406	3250	1356-2644	1000-1950	10.50	362	1/2	3/4	594	21		
D-Handle														
2950B7	1-1/2	3750	4067	3000	2170-3390	1600-2500	14.80	368	1/2	3/4	427	15		
3955B2Ti	1-1/2	2750	6779	5000	2170-5288	1600-3900	15.70	419	1/2	3/4	481	17		
SPARK PROOF														
Pistol Grip														
2131PSP	1/2	9500	816	600	68-544	50-400	2.00	180	1/4	3/8	136	4.8		
2141PSP	3/4	7250	1627	1200	271-1220	200-900	3.20	208	3/8	1/2	270	9.5		
2151P1SP	1	7250	1627	1200	271-1220	200-900	3.40	208	3/8	1/2	270	9.5		
D-Handle														
2940B2SP-EU	1	5000	2710	2000	1360-2170	1003-1600	12.90	311	1/2	3/4	368	13		

* Source: IR Australia

(f) All models are reverse bias except the 2925 series which are forward bias.

Specifications are a guide only and can be subject to change without notice.

IMPACT WRENCH

Fully certified to ATEX Directives, these are the tool of choice for specialised application within the petrochem and mining industries, and in any production or processing areas where hazardous atmospheres can occur.

Spark Proof Series Impacttools

2131PSP

- 1/2" Square Drive Impact Wrench
- High Output Twin Hammer
- Pressure Feed Lubrication
- Reverse Biased Motor Cylinder
- One Hand Operation (fwd/rev)
- 360 degree Swivel Inlet
- In Handle Exhaust



2141P1SP

- 3-4" Square Drive Impact Wrench
- High Output Twin Hammer
- Pressure Feed Lubrication
- 6 Vanes, High Output Air Motor
- One Hand Operation (fwd/rev)
- 360 degree Swivel Inlet
- Bronze Endplates
- In Handle Exhaust



2151P1SP

- 1" Square Drive Impact Wrench
- High Output Twin Hammer
- Pressure Feed Lubrication
- 6 Vanes, High Output Air Motor
- 360 degree Swivel Inlet
- Bronze Endplates
- In Handle Exhaust



2940B2SP-EU

- 1" Square Drive Impact Wrench
- 6 Vanes, High Output Air Motor
- High Output Twin Hammer
- Bronze Endplates
- Proven Reliability and Long Life



Model	Style	Square Drive	Free Speed	Maximum Torque Reverse	Forward Torque Range	Weight	Length	Air Inlet	Min Hose Size	Average Air Consumption	
		in	rpm	ft-lb	ft-lb	kg	mm	in	in	lpm	cfm
2131PSP	Pistol	1/2	9500	600	50-400	2.0	175	1/4	3/8	136	4.8
2141PSP	Pistol	3/4	7250	1200	200-900	3.2	208	3/8	1/2	270	9.5
2151P1SP	Pistol	1	7250	1200	200-900	3.2	208	3/8	1/2	270	9.5
2940B2SP-EU	In-Line Inside Trigger	1	5000	2000	1003-160	12.9	311	1/2	3/4	368	13

IMPACT WRENCH KITS

We've gone one step further and created the perfect match... We've combined your favourite IR Impact Gun with a set of genuine IR Industrial Strength Sockets.

All 1/2" Impact Wrench kits include 10 Ingersoll-Rand Industrial Grade Standard Sockets in sizes: 10mm, 11mm, 12mm, 13mm, 14mm, 17mm, 19mm, 21mm, 22mm and 24mm plus a 3" Extension Bar plus an Impact Resistant Blow Moulded Carry Case. All 3/4" kits include six Ingersoll-Rand deep metric sockets in sizes: 24mm, 27mm, 30mm, 32mm, 33mm, 36mm, plus a 3" Extension Bar plus an Impact Resistant Blow Moulded Carry Case.

IR Impact Gun supplied with IR Sockets

2135TiMAX-KIT

- 1/2" Air Impact Wrench Kit
- Available with 2" Extension Anvil 2135Ti-2MAX-KIT



The Titanium 2135TiMAX delivers 1,100 ft-lb of nutbusting torque in a gun that weighs just 1.99kg. The 7 vane power plant drives enough torque to break away a nut tightened to over 1,100 ft-lb in under six seconds.

2130AP-KIT

- 1/2" Air Impact Wrench Kit
- Available with 2" Extension Anvil 2130AP-2-KIT



The 2130AP has all the performance features you have come to expect from the Ingersoll Rand family of Impacttools. This Impacttool features a powerful twin hammer mechanism and a composite housing, providing superior ergonomics in a lightweight package.

131S-EA-KIT

- 1/2" Air Impact Wrench Kit
- Available with 2" Extension Anvil 131S-2-EA-KIT



The classic 131S-EA is the most popular tool in its class. Offering the sheer power and performance features to tackle the toughest jobs with ease as well as proven durability and economy.

231C-AP-KIT

- 1/2" Air Impact Wrench Kit

The classic 231C is the most popular tool in its class. Introduced over 25 years ago and continuously refined, it offers the sheer power and performance to tackle the toughest jobs with ease - as well as proven durability and economy.



2141-KIT

- 3/4" Air Impact Wrench Kit

The 2141 also provides great manoeuvrability for tight, awkward spaces. Contoured professional touch trigger and ergonomically designed handle for increased comfort.



IMPACT WRENCH KITS

Cordless Kits

W360

- 1/2" Square Drive Cordless Impact Wrench Kit
- Pound for pound, the W360 is the most powerful cordless Impactool in the world
- Lightweight Composite housing with metal subframe for unbreakable strength
- Unique twist to lock mount design attaches battery securely to tool
- Both Lithium-ion and Nickel Cadmium models available
- All metal hammer case and housing ring, variable trigger
- W360SPL2 comes with 2 x Li-Ion Batteries, Charger and IR Carry Bag
- W360-KL2 comes with 2 x Li-Ion Batteries, Charger and IR Hard Case
- 2" Extended Anvil model available W360-2
- Batteries, Skins and Charger can also be sold separately
- Also available: Ratchets, Die Grinders and Cut Off Saw



Model	Maximum Torque Reverse		Usable Torque Range		Free Speed	BPM	Weight w/o Battery		Length	Voltage
	ft-lb	Nm	ft-lb	Nm			lbs	kg		
W360	360	488	25-280	34-379	1650	2200	4.8	2.2	227	19.2
W360-2	360	488	25-280	24-279	1650	2200	4.8	2.2	267	19.2

D650

- 1/2" Cordless Drill/Driver Kit
- The D650 offers the most power pound for pound of any cordless drill/driver in its class
- Patent-pending IQv technology ensures maximum performance, durability and battery life
- Industrial keyless ratcheting chuck with carbide steel teeth guarantees industrial grade performance
- Engineered composite housing with patent pending metal subframe for unbreakable strength
- Ideal for all drilling, boring, fastening and screwing application
- Two speed all metal gear train for the ultimate in power and durability
- D650SPL2 comes with 2 x Li-Ion Batteries, Charger and IR Carry Bag
- D650-KL2 comes with 2 x Li-Ion Batteries, Charger and IR Hard Case
- D550 kits available



Model	Maximum Torque Reverse		Free Speed	Weight w/o Battery		Length	Voltage
	inch-lb	Nm		lbs	kg		
D550	550	62.14	1300	3.2	1.45	245	14.4
D650	650	73.45	1300	3.2	1.45	245	19.2

MINI TOOLS

Kits

2101K

- 1/4" Impactool Kit
- Max Torque: 50ft-lb (68Nm)
- Length: 159mm
- Includes 10 piece 1/4" Socket Set
- Average Air Consumption: 1.76cfm (50lpm)



7804K

- 1/4" Drill Driver Kit
- Torque: 22.5in-lb (30.5Nm)
- Free Speed: 1800rpm
- Length: 185mm
- Enhance durability & smooth power delivery
- Kit includes 22-piece drill bit and driver set
- Average Air Consumption: 1.92cfm (54lpm)



3103K

- Surface Prep Grinder Kit
- Adjustable Speed Settings
- Free Speed: 15,000rpm
- Motor: 0.2hp
- Length: 127mm
- Pad Size: 2" (50.8mm) and 3" (76.2mm)
- Enhance durability & smooth power delivery
- Kit includes 14-piece 2" and 3" sanding discs
- Average Air Consumption: 2.07cfm (58lpm)



3128K

- Orbital Sander Kit
- Swirl Free Finish
- Pad Size: 3" (7.62mm)
- Free Speed: 15,000rpm
- Motor: 0.2hp
- Length: 140mm
- Enhance durability & smooth power delivery
- Kit includes 71-piece hook-and-loop discs
- Average Air Consumption: 2.06cfm (58lpm)



3129K

- Mini Polisher Kit
- Free Speed: 6000rpm
- Delivers Superior Performance
- Adjustable Speed Settings
- Pad Size: 3" (7.62mm)
- Free Speed: 6,000rpm
- Motor: 0.3hp
- Length: 152mm
- Kit includes 4-piece hook-and-loop pads
- Average Air Consumption: 2.21cfm (60lpm)



SOCKETS

Industrial Grade Impact Socket Sets - Don't let the good looks fool you!

- Impact Grade Toughness
- Chrome-molybdenum Steel
- Laser-etched Size Labelling
- Electro-phosphate Finish
- Backed by a Lifetime Warranty
- Kits and individual sockets available



The Mega Socket Set

- THIS ONE DOES IT ALL**
- Covers the Entire 1/2" and 3/8" Drive Range
 - Versatility & convenience on the job
 - Easy on the pocket



Model: SK34C86
Sizes 5/16" to 1-1/4" and 9mm to 27mm

Also Available

- A Huge Range of Individual Sockets
- Adaptors
- Extensions
- Universal Joints
- Socket Retainers



Model: SK68HL

Model	No. of Pieces	Description	Contents
SK4C3F	3	1/2" Drive Lugnet Service Flip Socket Set	3/4" x 3/16", 19mm x 21mm, 3" extension
SK4H13	13	1/2" Drive SAE Standard Socket Set	7/16", 1/2"9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-1/4"
SK4H13L	13	1/2" Drive SAE Deep Socket Set	7/16", 1/2"9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-1/4"
SK4M14	14	1/2" Drive Metric Standard Socket Set	10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 21mm, 22mm, 26mm, 27mm
SK4M14L	14	1/2" Drive Metric Deep Socket Set	10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 21mm, 22mm, 26mm, 27mm
SK6H8	8	3/4" Drive SAE Standard Socket Set	1", 1-1/16", 1-1/8", 1-1/4", 1-5/16", 1-3/8", 1-7/16", 1-1/2"
SK6H8L	8	3/4" Drive SAE Deep Socket Set	1", 1-1/16", 1-1/8", 1-1/4", 1-5/16", 1-3/8", 1-7/16", 1-1/2"
SK6M6L	6	3/4" Drive Metric Deep Socket Set	24mm, 27mm, 30mm, 32mm, 33mm, 36mm

AIR HOISTS & WINCHES

Ingersoll Rand Hoists from 500kg to 50,000kg

Hoist Options

- Chain Buckets
- Additional Lift (extra chain)
- Additional Control Line Length
- Trolley

Hoist Capacity	Model	Standard Lift		Control Type
		ft	M	
250	ARO 7718E-1 C20-C16	20	6	Pull Chain
	ARO 7718E-2 C20-C16	20	6	Pendant
500	ARO 7756E-1 C20-C16	20	6	Pull Chain
	ARO 7756E-2 C20-C16	20	6	Pendant
1000	ARO 7776E-1 C20-C16	20	6	Pull Chain
	ARO 7776E-2 C20-C16	20	6	Pendant
1000	ARO 7790A-1 C20-C16	20	6	Pull Chain
	ARO 7790A-2 C20-C16	20	6	Pendant
2000	ARO 7792A-1 C20-C16	20	6	Pull Chain
	ARO 7792A-2 C20-C16	20	6	Pendant

Larger units and options available
Performance figures at 620kPa (90psi)



RATCHET WRENCH

1" Impact Wrench

1105MAX-D2 / 1105MAX-D3

- 1/4" drive (1105MAX-D2) or 3/8" drive (1105MAX-D3)
- Max Torque: 30ft-lb (41Nm)
- Length: 187mm
- Weight: 0.65Kg
- Variable power regulator
- Ergonomic grip
- Speed: 300rpm
- Ave Air Cons: 3.5 cfm 99 lpm



170 / 1770

- 3/8" drive (170) or 1/2" drive (1770)
- Max Torque: 60 ft-lb (81 Nm)
- Working Torque: 10-55 ft-lb
- Great value IR ratchet
- Length: 260 mm
- Weight: 1.1 kg
- Ave Air Cons: 4.0 cfm 113 lpm



1207MAX-D3 / 1207MAX-D4

- 3/8" drive (1207MAX-D3) or 1/2" drive (1207MAX-D4)
- Max Torque: 65 ft-lb (88 Nm)
- Working Torque: 10-60 ft-lb
- Composite handle
- Adjustable exhaust direction
- Length: 275 mm
- Weight: 1.45 kg
- Speed: 220 rpm
- Ave Air Cons: 4 cfm 113 lpm



109XPA / 1099XPA

- 3/8" drive (109XPA) or 1/2" drive (1099XPA)
- Max Torque: 76 ft-lb (95 Nm)
- Working Torque: 10-60 ft-lb
- Super fast ratchet, swivel inlet
- Adjustable exhaust direction
- Length: 302 mm
- Weight: 1.4 kg
- Ave Air Cons: 4 cfm 113 lpm



**Super Duty,
Powerful Ratchet**

GRINDER

Grinder

301

- 1/4" Collet
- 20,000 rpm
- Powerful 1/4 hp motor
- Ball Bearing Constructions
- Length: 127 mm
- Weight: 0.45 kg
- Ave Air Cons: 3 cfm 85 lpm

**301-K**

Die Grinder Kit
Kit comes with:

- 1 x 301 Right Angle Die Grinder
- 5 x 1/4" Shank Mounted Points
- 5 x 1/8" Shank Mounted Points
- 1 x 1/8" Collet
- 1 x Case

**301-32MK**

Die Grinder Kit
Kit comes with:

- 1 x 301 Right Angle Die Grinder
- 1 x 2" Backing Pad Roloc Style
- 1 x 3" Backing Pad Roloc Style
- 4 x 2" Surface Prep Discs
- 4 x 3" Surface Prep Discs
- 1 x Case

**307A**

- 1/4" Collet
- 27,000 rpm
- Powerful 1/4hp motor
- Compact & maneuverable
- Length: 121 mm
- Weight: 0.31 kg
- Ave Air Cons: 3 cfm 85 lpm

**307-K**

Die Grinder Kit
Kit comes with:

- 1 x 307A Right Angle Die Grinder
- 5 x 1/4" Shank Mounted Points
- 5 x 1/8" Shank Mounted Points
- 1 x 1/8" Collet
- 1 x Case

**3102**

- 1/4" Collet
- 20,000 rpm
- Powerful 1/3 hp motor
- Ball bearing constructions
- Length: 143 mm
- Weight: 0.53 kg
- Ave Air Cons: 3 cfm 85 lpm

**3108**

- 1/4" Collet
- 25,000 rpm
- Powerful 1/3 hp motor
- Ball Bearing Constructions
- Length: 171 mm
- Weight: 0.58 kg
- Ave Air Cons: 3 cfm 85 lpm

**3108K**

Die Grinder Kit
Kit comes with:

- 1 x 3108 Str Die Grinder
- 4 x Carbide Burrs
- 1 x Case

**3102K**

Die Grinder Kit
Kit comes with:

- 1 x 3102 Right Angle Die Grinder
- 1 x 2" Backing Pad Roloc Style
- 1 x 3" Backing Pad Roloc Style
- 4 x 2" Sanding Discs
- 4 x 3" Sanding Discs
- 4 x 2" Surface Prep Discs
- 4 x 3" Surface Prep Discs
- 1 x Case

**308A**

- 1/4" Collet
- 25,000 rpm
- Powerful 1/3 hp motor
- Ball bearing construction
- Length: 143 mm
- Weight: 0.53 kg
- Ave Air Cons: 3 cfm 85 lpm

**LA421-EU**

- 4.0" Disc Angle Grinder
- 12,000 rpm
- Length: 229mm
- Powerful 1.0hp Motor
- Weight: 1.80kg
- 3/8"-24 Arbor
- Ave Air Cons: 6 cfm 170 lpm

**LA422-EU**

- 5" Disc Grinder
- 12,000 rpm
- Length: 229 mm
- Powerful 1.0 hp motor
- Weight: 1.85 kg
- 3/8" - 24 Arbor
- Ave Air Cons: 6 cfm 170 lpm

**3445MAX-M / 345MAX-M**

- 4-1/2" Disc Angle Grinder (3445MAX-M) or 5" Disc Angle Grinder (345MAX-M)
- 12,000 rpm
- Length: 245mm
- Powerful 0.88hp Motor
- Weight: 1.6kg
- 14mm Arbor
- Ave Air Cons: 10cfm 283lpm



Durable & Economical

DRILLS

Screwdriver

371

- Reversible Screwdriver
- Pistol Grip
- 1,800rpm
- 0.44hp Motor
- Weight: 1.15kg
- Length: 188mm
- ¼" Hex driver
- Ave Air Cons: 4cfm 113 lpm



7802RAKC

- Reversible Drill - Keyless Chuck
- 3/8" (10 mm) keyless chuck
- 2,000 rpm
- 0.5hp motor
- Length: 163 mm
- Weight: 1.13kg
- Ave Air Con: 4 cfm 113 lpm



7802RA

- Reversible Drill - Keyed Chuck
- 3/8" (10 mm) chuck
- 2,000 rpm
- 0.5 hp motor
- Length: 163 mm
- Weight: 1.13 kg
- Ave Air Con: 4 cfm 113 lpm



7803RAKC

- Reversible Drill - Keyless Chuck
- 1/2" (13 mm) keyless chuck
- 400 rpm
- 0.5 hp motor
- Length: 221 mm
- Weight: 1.5 kg
- Ave Air Con: 4 cfm 113 lpm



7803RA

- Reversible Drill - Keyed Chuck
- 1/2" (13 mm) chuck
- 400 rpm
- 0.5 hp motor
- Length: 221 mm
- Weight: 1.5 kg
- Ave Air Con: 4 cfm 113 lpm



7807R

- Reversible Drill - Keyed Chuck
- Right Angle Drill
- 3/8" (10 mm) chuck
- 1,800 rpm
- 0.33 hp motor
- Length: 206 mm
- Weight: 1.13 kg
- Ave Air Con: 4 cfm 113 lpm



Air Hammer

116K

- Air Hammer Kit
- 1 x 116 Air Hammer
- 0.401 Shank
- 3,500 bpm
- Weight: 1.54 kg
- Length: 198 mm
- Stroke: 67 mm
- Avg Air Consumption: 3 cfm 85 lpm
- Includes 5-Piece Chisel Kit in a Cardboard Box



117K

- Air Hammer Kit
- 1 x 117 Air Hammer
- 0.401 Shank
- 2,000 bpm
- Weight: 1.86 kg
- Length: 251 mm
- Stroke: 89 mm
- Avg Air Consumption: 3 cfm 85 lpm
- Includes 5-Piece Chisel Kit in a Cardboard Box



121

- Designed for body panel crimping & cutting, bush driving, shearing & general front end work.
- 19 mm bore x 58 mm stroke
- 3000bpm
- Weight: 1.59 kg
- 0.401 Shank
- Length 194 mm
- Avg Air Consumption: 3cfm 85 lpm



121-K6

- Air Hammer Kit
- 1 x 121 Air Hammer
- Includes 6-Piece Chisel Kit
- in a Blow Molded Case



5-Piece Chisel Kit
Included with 116K and 117K

SCALERS & NEEDLE SCALERS

Scalers

125

- Std Needle Scaler
- 4600 bpm
- 19 needles (3.2 mm)
- Length 465 mm
- Weight 2.8 kg
- Avg Air Consumption: 8 cfm 226 lpm



182LNA1

- Lever throttle Needle Scaler
- 4,000bpm
- 28 needles
- Length 381mm
- Weight 2.61kg
- Bore 24mm x 27mm Stroke
- Avg Air Cons: 13cfm 368 lpm



182L

- Straight Chisel Scaler
- Lever throttle Scaler
- 4,000bpm
- Length: 229mm
- Weight: 1.84kg
- Bore 24mm x 27mm Stroke
- Avg Air Cons: 13cfm 368 lpm



182K1

- Straight Needle/Chisel Scaler Kit
- 1 x 182L Scaler
- 1 x Needle Attachment Assy with 5" Needles
- 1 x Extra set of 5" Needles
- 1 x Set of 7" Needles
- 3 x Chisels
- 1 x Case



180PG

- Pistol Grip Scaler
- 2,200bpm
- No of Needles: 28
- Weight 4.0Kg
- Length 342mm
- Bore 28mm x 39mm stroke
- Ave Air Cons: 8cfm 226 lpm



SANDERS

General Purpose Sanders

311A

- 6" Dual Action
- Quiet (built in silencer)
- Adjustable speed regulator
- 12,000rpm, 0.25hp
- Spindle: 5/16" - 24
- Weight: 1.9 kg
- Ave Air Cons: 4 cfm 113 lpm



312A

- Orbital Sander
- 92 mm x 171 mm
- 8,000 rpm, 0.3 hp
- Weight: 2.1 kg
- Built-in speed regulator
- Ave Air Cons: 9 cfm 255 lpm
- Great for fibreglass, wood and body filler as well as sanding any painted surface.



315

- Straight Line Sander
- Twin Piston
- 70 mm x 445 mm
- 3,000 bpm
- 25 mm stroke
- Weight: 2.99 kg
- Quick action paper clamps
- Twin piston design prevents stalling
- Ave Air Cons: 8 cfm 226 lpm



317A

- 5" High Speed
- Also has 3" backing pads
- 18,000rpm
- Power regulator
- Weight: 1.04kg
- Ave Air Cons: 12 cfm 340 lpm
- Ideal for light sanding, feather edging & rust removal.



313A

- 7" Angle Sander
- Heavy Duty 0.5hp Motor
- Lever throttle
- 5,000 rpm
- Weight: 2.04 kg
- Ave Air Cons: 8 cfm 226 lpm
- Work faster on light & heavy sanding jobs including rough body filler, removing rust & smoothing welds.



328B

- 8" Geared Orbital Sander
- Heavy Duty 0.25hp Motor
- Lever throttle
- 825 rpm, 5/32" orbit
- Weight: 2.13 kg
- Ave Air Cons: 4 cfm 113 lpm
- Smooth strength & power lets you remove heavy material & body filler on large, flat surfaces leaving a clean, swirl free finish.



Polishers & Buffers

314A

- 7" Angle Polisher/Buffer
- 1500-2500rpm
- Built in regulator
- Weight: 2.04 kg
- Ave Air Cons: 8 cfm 226 lpm
- Ideal for buffing & polishing a wide range of surfaces to a high gloss.



77A25F107

- 1.5HP Industrial Grade Polisher
- Weight 3.70 Kg
- Length 446mm
- 2,500rpm
- Ave Air Con 10cfm 283 lpm



SANDERS

Finishing Sanders

4151 / 4151-HL

- 6" High Speed
- 3/16" Orbit
- Ultra Duty
- 12,000rpm
- Vacuum ready
- Weight: 0.87 kg
- Ave Air Cons: 8 cfm 226 lpm
- Dust is channelled away from work, swirl free finish.
- 4151 takes adhesive pads, 4151-HL takes hook & loop pads



4152 / 4152-HL

- 6" Finishing Sander
- 3/32" Orbit
- Ultra Duty
- Adjustable RPM up to 12,000 rpm
- Vacuum ready
- Light Weight: 0.87 kg
- Ave Air Cons: 8 cfm 226 lpm
- Dust is channelled away from work, swirl free finish.



4151JV

- Jet Vac Conversion Kit
- Vacuum Kit to suit 4151 and 4152



AUTOMOTIVE REPAIR TOOLS

Automotive Repair Tools

429

- Air Reciprocating Saw
- 10,000 stroke/min
- Weight 0.6kg
- Length 210mm
- Comes with 6 HSS Blades
- Cuts Flat and curved Surfaces
- Ave Air Con 9 cfm 255 lpm



4429

- Composite Grip
- 5,750 strokes/min
- Weight: 0.74kg
- Length: 235mm
- Piped away exhaust
- Ave Air Con 7 cfm 198 lpm
- Adjustable guard, integral power regulator & low vibration.
- Air Reciprocating Saw for body muffler & exhaust work.



7802SA

- Air Shear
- 4,200 Strokes per min
- Weight 1.27kg
- Length 239mm
- Cuts Squ, Angles and Circles
- Cuts up to 20G
- Avg Air Con 4cfm 113 lpm



325B

- Air Nibbler
- Cuts up 18 gauge
- Holds a tight 1/4" radius
- 3,200 strokes/min
- Weight: 0.95kg
- Length: 185mm
- Ave Air Cons: 4 cfm 113 lpm
- Cuts (nibbles) cold rolled steel plastic, tin, aluminium & other metals.



326

- Exhaust Cut Off Tool
- Takes 3" x 3/8" x 1/16" discs
- 18,000 rpm
- Speed regulator
- Weight: 1.04kg
- Ave Air Con 10 cfm 283 lpm
- Cuts exhaust pipe, sheet metal, nuts & bolts with ease. Fast quiet operation. 360 degree rotatable spark guard.



327

- Tyre Buffer
- High Speed
- 22,000rpm
- 10mm chuck
- 0.5hp motor
- Weight: 0.73kg
- Ave Air Con 15 cfm 425 lpm
- Makes quick work of patchwork & roughing up areas for recapping & tyre scuffing.



327LS

- Tyre Buffer
- Low Speed
- 3,000rpm
- Quick change chuck
- Built in regulator
- Weight: 0.51kg
- Ave Air Con 14 cfm 396 lpm
- Safety lock lever, piped away exhaust & hanger make this tool ideal for tyre patchwork & roughing areas for recapping.



PAVING BREAKERS

Paving Breakers

PB35AS

- Weight: 20kg
- Length: 625mm
- Blows/min: 1250
- Air Inlet: 3/4" NPT
- Includes Muffler
- Chisel Type: 1" x 4 1/4" Hex
- Air Consumption: 48 cfm



PB50AS-OPT-AF

- Weight: 25 kg
- Length: 699 mm
- Blows/min: 1150
- Air Inlet: 3/4" NPT
- Includes Muffler
- Chisel Type: 1 1/8" x 6" Hex
- Air Consumption: 62 cfm



MX60AF

- Weight: 32kg
- Length: 686 mm
- Blows/min: 1250
- Air Inlet: 3/4" NPT
- Optional Muffler
- Chisel Type: 1 1/8" x 6" Hex
- Air Consumption: 70 cfm



GENERAL PURPOSE

Diggers / Mini Breakers / Demolition Tools

93LA1M-EU

- Suitable for horizontal or vertical use
- Weight: 10.4kg
- Blows/min: 2,350
- Air Inlet: 3/8"
- Muffler Included
- Chisel Type: 7/8" x 3 1/4" Hex
- Latch type chisel release
- Air Consumption: 45cfm



95LA1

- Suitable for horizontal or vertical use
- Weight: 12.7kg
- Blows/min: 1,850
- Air Inlet: 3/8"
- Muffler Optional
- Chisel Type: 7/8" x 3 1/4" Hex
- Latch type chisel release
- Air Consumption: 47cfm



For an excellent range of steels and chisels refer to page 13

Rivet Busters

9001

- Heavy Demolition
- Weight: 11.2 kg
- Stroke: 229 mm (9")
- Chisel Type: Tapered Round
- Air Inlet: 1/2"
- Blows/min: 900
- Length: 572 mm
- Air Consumption: 40 cfm



CHIPPERS

W Series Chippers

W1A1

- Length: 403 mm
- Piston Stroke: 25 mm
- Blows/Min: 2,500
- Air Inlet: 3/8"
- Net Weight: 6.7 kg
- Air Consumption: 28 cfm



W2A1

- Length: 416 mm
- Piston Stroke: 51 mm
- Blows/Min: 2,300
- Air Inlet: 3/8"
- Net Weight: 7.0 kg
- Air Consumption: 28 cfm



W3A1

- Length: 464 mm
- Piston Stroke: 76 mm
- Blows/Min: 1,725
- Air Inlet: 3/8"
- Net Weight: 7.5 kg
- Air Consumption: 29 cfm



W4A1

- Length: 489 mm
- Piston Stroke: 102 mm
- Blows/Min: 1,480
- Air Inlet: 3/8"
- Net Weight: 7.9 kg
- Air Consumption: 29 cfm



TAMPERS

W Series Chippers

130A1M

- Bench type
- Weight: 5.24kg
- Blows/min: 870bpm
- Stroke: 63mm (2 1/2")
- Length: 546mm
- Air Inlet: 1/4"
- Standard butt size: 2 1/2"
- Air Consumption: 14cfm



341A2M

- Weight: 15.8 kg
- Blows/min: 1550
- Stroke: 102 mm (4")
- Length: 1340 mm
- Air Inlet: 1/2"
- Standard butt size: 146 mm maleable (5 3/4")
- Optional butt (34SR-383): 76 mm steel
- Air Consumption: 29 cfm



CHISELS & ACCESSORIES

	93LA1 / 95LA1			PB35			PB50, MX60			MX90		
	7/8" x 3 1/4" Hex (22 x 83 mm)			1" x 4 1/4" Hex (25 x 108 mm)			1 1/8" x 6" Hex (28 x 150 mm)			1 1/4" x 6" Hex (32 x 150 mm)		
TYPE	mm	(in)	Part Number	mm	(in)	Part Number	mm	(in)	Part Number	mm	(in)	Part Number
Moil Point	380	15"	50050269	380	15"	50050368	380	15"	50050475	380	15"	50055680
	460	18"	50050277	460	18"	50050376	460	18"	50055524	460	18"	50055698
	610	24"	50050285	610	24"	50050392	610	24"	50055540	610	24"	50055714
Narrow Chisel	380	15"	50199207	380	15"	50197805	380	15"	50197904	380	15"	50196385
	460	18"	50199215	460	18"	50197821	460	18"	50197912	460	18"	50196401
	610	24"	50199223	610	24"	45510245	610	24"	50197938	610	24"	50196419
Wide Chisel 75mm (3") wide	380	15"	50195288	380	15"	50195320	380	15"	50114883	380	15"	50193879
Digging Chisel 75mm (3") wide	420	16"	22040968	420	16"	22040976	420	16"	22040984	420	16"	50186014
Clay Spade 140mm (5 1/2") wide	420	16"	50189596	420	16"	50189554	420	16"	50189562	420	16"	50189570
Asphalt Cutter 127mm (5") wide	305	12"	22040935	305	12"	50190404	305	12"	50185982	305	12"	50185990

Rivet Buster Chisels			
	0.888 Round Tapered (22.6 x 48 mm) 9001		
TYPE	mm	(in)	Part Number
Moil Point	300	12"	9001-297-12
	450	18"	9001-297-18
Flat Chisel	230	9"	9001-276-9-1/2
	300	12"	9001-276-12
Side-Cut Chisel	230	9"	9001-276-18
	230	9"	9001-277-9-1/2
Backout Punch (1/2" Diameter)	241	9 1/2"	9001-279
Backout Punch (5/8" Diameter)	241	9 1/2"	9001-280

Needle Scalers Chisels			
	172/182	170PG/180PG	
TYPE	mm	(in)	Part Number
Narrow Chisel	180	7"	WF-14F-7
	300	12"	WF-14F-12
Standard Wide 1 3/8"	180	7"	WF-14B-007
	300	12"	WF-14B-012
2" Wide Chisel	180	7"	WF-14C-007
3" Wide Chisel	180	7"	WF-14D-007
Spoon 1 3/8"	180	7"	WF-14A-007
Gouge	180	7"	WF-14G-6

Air Hammer	
	0.401 Shank 115, 116, 117, 121
TYPE	Part Number
5 Piece Chisel Kit	9500
Tail Pipe Cut Off Tool	950011
Slotted Panel Cutter	950012
Rivet and Bolt Cutter	950013
Pneumatic Scraper (1 1/4")	950014
Pneumatic Hammer Chisel	950015
Pneumatic Cold Chisel (3/4")	950016
Pneumatic Cold Chisel (1/2")	950017
Muffler and Tailpipe Remover	950018
Pneumatic Ball Joint Separator	950019

W-Series Chippers			
	5/8" x 2 1/2" Hex Shank (16 x 63mm)		
TYPE	mm	(in)	Part Number
Moil Point	230	9"	H3R-214M-9
	300	12"	H3R-214M-12
	450	18"	H3R-214M-18
	600	24"	H3R-214M-24
Narrow Chisel	230	9"	H3R-214F-9
	300	12"	H3R-214F-12
	450	18"	H3R-214F-18
	600	24"	H3R-214F-24
	900	36"	H3R-214F-36
1 1/2" Scaling Chisel	300	12"	H3R-214B-12
2" Scaling Chisel	300	12"	H3R-424-12
Blank Chisel	300	12"	H3R-214G-12
Caulking Chisel	300	12"	H3R-214E-12

Needles	Needle Scaler		
	172/182 170PG/180PG		
TYPE	mm	(in)	Part Number
3mm x 5" Pack 19 Flat	125	5"	NS11-22-19
3mm x 7" Pack 19 Flat	180	7"	NS11-122-19
3mm x 5" Pack 100 Flat	125	5"	22038533
3mm x 7" Pack 100 Flat	180	7"	89940597
3mm x 7" Pack 100 Chisel Tip	180	7"	22038574

Needle Scalers and Chisels			
	125 - Cleco		
TYPE	mm	(in)	Part Number
Narrow Chisel	180	7"	PF2200-392
Standard Chisel	180	7"	PF2200-393
2" Wide Chisel	180	7"	PF2200-390
3" Wide Chisel	180	7"	PF2200-390-3
Needles 3.2mm x Pack 19			PF2219-22-19

Accessories		Air Hammer
		0.401 Shank 115, 116, 117
TYPE	Part Number	
Spring Type Chisel Retainer	9505	
Quick Change Chisel Retainer	9510	

Accessories		Air Hammer
		0.401 Shank 121, 132
TYPE	Part Number	
Spring Type Chisel Retainer	AVC10-183A	
Quick Change Chisel Retainer	9512	

Moil Point	
Narrow Chisel	
Wide Chisel 3" wide	

Digging Chisel 3" wide	
Clay Spade 5 1/2" wide	
Asphalt Cutter 5" wide	

Flat Chisel	
Side-Cut Chisel	
Backout Punch	

Scaling Chisel	
Caulking Chisel	
Blank Chisel	

PUMPS

Diaphragm Pumps

ARO PUMPS


- ARO Double Diaphragm Pumps
- All sizes for pumping a wide range of fluids.
- 1/2" - 3" models available.



Sump Pumps

S35 PUMP

- S35 Submersible Pumps
- Delivers excellent flow (eg 450 litres / min @ 50 m)
- Super Head Height (head to 70 m)
- Durable cast-iron housing
- Highly wear resistant impeller
- Inlet air filter screen
- Oversized bearings
- Laminated resin vanes
- Latch type chisel release
- The best choice for dependable pumping
- Discharge: 2" BSP
- Weight: 36kg

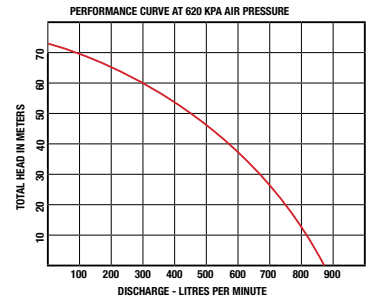

ACCESSORIES

Various

Air Hoses

- With Fittings
- 10mm (3/8") dia
- Nitto - AH10N20
- 20m lengths (includes quick-connect coupling fittings)



Hose Reels

- Retractable
- Pivots 180° 1/4" BSP Fitting
- 16m, 10mm hose AH10R16
- 30m, 10mm hose AH10R30



Air Hose PVC Ultraflex - Rolls

- PH6ULT/20 - 6mm hose x 20m length
- PH10ULT/20 - 10mm hose x 20m length
- PH12ULT/20 - 12mm hose x 20m length
- PH20ULT/20 - 20mm hose x 20m length
- PH25ULT/20 - 25mm hose x 20m length
- Various lengths available: 20m to 300m



Claw Couplings

- Hose Tail - 1/2" MIN-AT1/2, 3/4" MIN-AT3/4, 1" MIN-AT1
- Lock Pin MIN-PIN
- Male (BSP) - 1/2" MIN-AM1/2 3/4" MIN-AM3/4, 1" MIN-AM1
- Female (BSP) - 1/2" MIN-AF1/2 3/4" MIN-AF3/4, 1" MIN-AF1
- Clamps - 1/2" MIN- AC1/2 3/4" MIN-AC3/4, 1" MIN-AC1



Air Exhaust Mufflers

- Use anywhere to reduce compressed air exhaust noises. Can also be used as a 10 micron inlet filter.
- SIZES (BSP)
 - 1/4" F02 1" F10
 - 3/8" F00 1 1/4" F12
 - 1/2" F05 1 1/2" F15
 - 3/4" F07 2" F20



Impact Wrench Grease Kit

- 105-LBK1
- Impact wrench grease
 - Air tool oil
 - Micro grease gun
 - Suits Metallic Housed Impact Wrenches
- 115-LBK1
- Impact wrench grease
 - Air tool oil
 - Micro grease gun
 - Suits Composite Housed Impact Wrenches



Lubricators

- Fits into the hose line.
- SIZES (BSP)
 - 1/2" 3LUB8
 - 3/4" 6LUB12
 - 1" 16LUB16



Tune Up Kits

For Impact Wrenches

Tune Up Kit	Impact Wrench
231-TK3	131S-EA
2130-TK1	2130AP
2131-TK1	2131
2135-TK2	2135TI/ 2135TIMAX
2141-TK1	2141
261-TK2	261
285B-TK1	285B

Impact Tool Oil

- 10Z4: Ait Tool Oil 4oz (120ml)
- 10P: Air Tool Oil 1 Pint (475ml)
- 10G: Air Tool Oil 5 Gallon (4.54 Litres)



Impact Wrench Covers

Protect your wrench from knocks

Protective Boot	Impact Wrench
2115-BOOT	2115TIMAX
231-BOOT	231C-AP & 131S-EA
2130-BOOT	2130AP
2131-BOOT	2131 2135TIMAX
2135M-BOOT	2135TIMAX
2141-BOOT	2141
261-BOOT	261



Impact Tool Grease

- 105-4T Grease for Metallic housed Impacts 4oz
- 105-1LB Grease for Metallic housed impacts 1lb (454gm)
- 115-4T Grease for Composite housed impacts 4oz
- 115-1LB Grease for Composite housed impacts 1lb (454gm)

Saw Blades Reciprocating

- NB: To suit 429, 4429 and all standard 1/2" Recip Saws
- P4FS-6: 32T Fine Standard Pits
- P4CS-6: 24T Course Standard P
- P4EV-6: Set of 6 14/18T Extra Course Variable Pitch (6 pack)
- 205885: Saw blades to suit SRA010A1



Sanding Pads

- 6130A: 7" Pad to suit 313A, 314A, 318A, 319A Sander
- 49835: 6" hook & loop pad to suit 4151-HL and 4152HL
- 49099: 6" stick it back pad to suit 4151 and 4152 sanders
- 9860: 6" Sanding pad 12,000rpm stick-it 311A



Abrasives

- 9520: Metal Cutting Discs (set of 5) 3"x3/8"x1/16" for models GC25 and 326 air cut off tools
- 02A-VAR-KIT: 2" Surface Preparation Kit
- 03A-VAR-KIT: 3" Surface Preparation Kit
- 9800: 5 piece die grinder stone kit



RECIPROCATING AIR COMPRESSORS

Elite Series - From the proven name & leader in compressed air products

Features

- Highly efficient Cast Iron pump
- Slow revving & cool running
- Reliable industrial motors/engines
- Genuine Ingersoll Rand Pumps
- Performance based on ACACA protocol
- High quality combined filter/regulator



Model	Motor	Type		Displacement*	Actual Delivery	Rated Pressure		rpm	Tank	Weight	DIM
	hp	V	Amp			psi	kpa				
EL12	2.2	240	10	11.1	7.7	125	865	800	50	71	1060x420x700
EL17	3.0	240	15	14.3	9.9	125	865	1170	50	73	1060x420x700
EL18P	5.5	Honda GX160		14.8	10.5	125	865	1195	50	75	1060x450x780

* Displacement and Actual Delivery based on ACACA protocol - only compare these figures with other ACACA performance figures

Procast Series - provides cast iron longevity, efficiency & reliability

Features

- Built to last Cast Iron pump
- Generous 174 litre receiver tanks
- Perfect for auto workshops
- Genuine Ingersoll Rand pumps
- Cost effective air solution



Model	Motor	Type		Displacement*	Actual Delivery	Rated Pressure		rpm	Tank	Weight	DIM
	hp	V	Amp			psi	kpa				
SS5/5	5.5	415	DOL	27.0	18.0	125	865	980	174	194	1524x510x700
SS10/7	7.5	415	DOL	39.0	26.0	125	865	700	174	216	1524x580x960
SS10/10	10.0	415	DOL	52.0	35.0	125	865	950	174	227	1524x580x960
SS10/10SD	10.0	415	SD	52.0	35.0	125	865	950	174	230	1524x700x960

* Displacement and Actual Delivery based at 100psi pressure. SS10/10SD includes Star Delta Starter

Type 30 Series - You know you have a good compressor package when it's asked for by name

The two-stage inter-cooled cast-iron V-design is still one of the most efficient and cool running on the market. Many of the models can handle the type of duty factors normally only found in rotary screw compressors.

Features

- Highly efficient 2 stage Cast Iron pump
- Slow revving & cool running
- Inter stage cooling
- Reliable industrial motors/engines
- Genuine Ingersoll Rand T30 pumps
- Large storage capacity



Model	Motor	Type		Displacement*	Actual Delivery	Rated Pressure		rpm	Tank	Weight	DIM
	hp	V	Amp			psi	kpa				
2340K3/8	3.0	415	DOL	12.4	9.8	125	865	1100	150	223	1140x540x970
2475K5/8	5.5	415	DOL	21.2	17.4	125	865	1060	150	245	1440x540x1000
2475C7/8	7.5	415	DOL	26.8	21.7	125	865	1340	230	307	1740x620x1050
2545C10/8	10.0	415	DOL/SD	40.5	34.2	125	865	1020	230	374	1740x620x1130
7100D15/8	15.0	415	SD	56.6	47.2	125	865	1030	303	583	1890x880x1325
3000E20/8	20.0	415	SD	85.8	70.7	125	865	780	445	750	1900x1100x1540
3000E30/8	30.0	415	SD	115	95.6	125	865	1045	445	800	1900x1100x1540

* Displacement and Actual Delivery based at 125psi pressure