
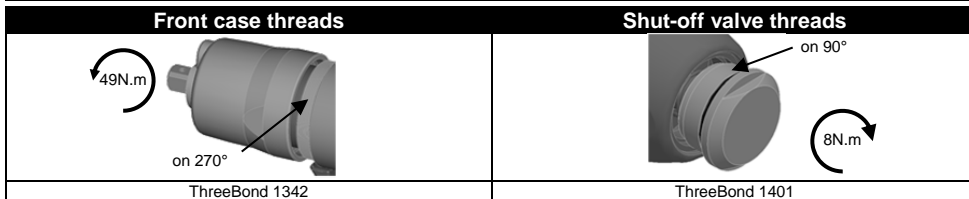
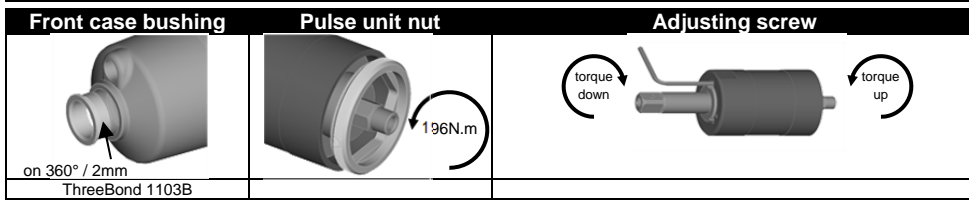
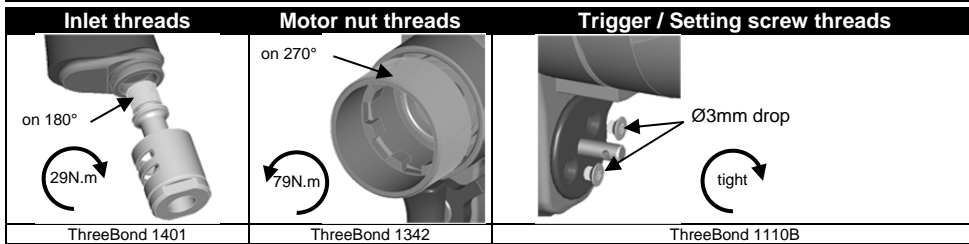



Part no 6159949642
 Issue no 07
 Series no D
 Page 4/4

PTF130-T4500-S13S

Mounting

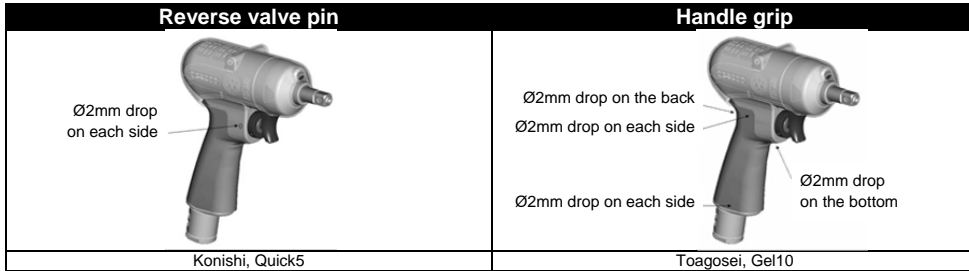

Lubrication

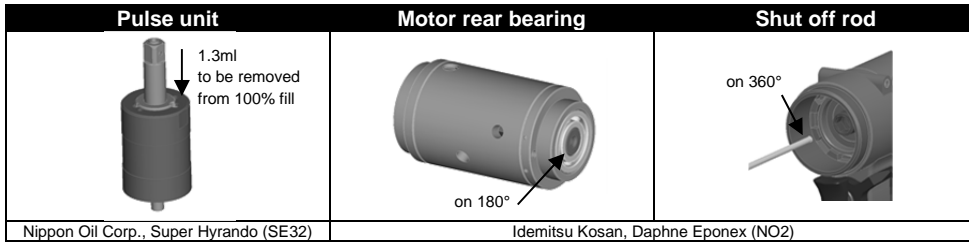

Desoutter Industrial
 Desoutter Ltd - Zodiac Unit 4 - Boundary way
 Hemel Hempstead - Herts - UK HP2 7SJ

Part no 6159949642
 Issue no 07
 Series no D
 Page 1 / 4

PTF130-T4500-S13S 6151720900

PTF130-T4500-S13S



Specifications

Bolt size	Square drive size		Mass (without socket)		Overall length (without socket)		Air inlet thread	Air hose size	
	mm	mm	kg	lb	mm	in	in	mm	in
M10-M12	12.7	1/2	1.9	4.1	217.5	8 5/8	PT 1/4	9.5	3/8

Recommended torque range						Rotational frequency	Air consumption (at load)	
N.m		kgf.m		ft.lb			rpm	l/min
70	120	7.1	13.2	51.6	95.8	4500	800	28.2

	Safety manual	2050502163
	Instructions manual	6159949610

Maintenance operations

Every 3 months / 100,000 cycles*
 Every 6 months / 200,000 cycles*
 Every 12 months / 400,000cycles*
 *whichever comes first

Refill and adjust oil in pulse unit
 Replace parts of service kits
 Check wearing parts and replace if necessary

Zampini Industrial Group

AirToolPro.com

1-800-353-4676

ZAMPINI
INDUSTRIAL GROUP

