



DIE GRINDERS

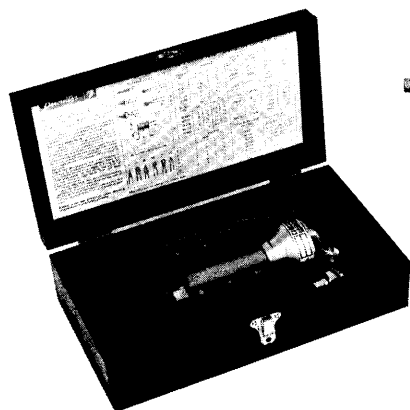

05-X



AS147-X



DB710-X




DB700-T


05-X
As boxed kit




L7115-T J7115-T



D711-T

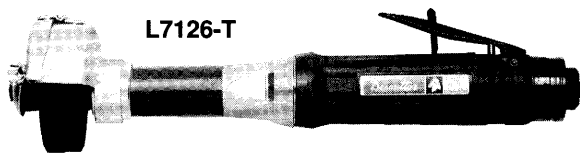

L7126-T

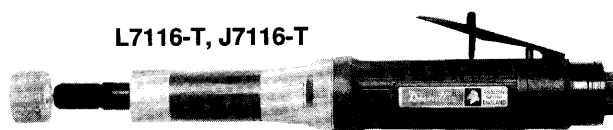

L7116-T, J7116-T

Specification

	Free Speed rpm	Collet Size Fitted		Collet Size Optional		Motor Power H.P.	Air Flow cfm	Min. Hose Bore ins.	Air Inlet NPT	Weight lbs.	Length ins.	Sound Level dB(A)	Vibration Level ms ⁻²
Tool Type		Size	Part No.	Size	Part No.								
Turbine Grinder													
05-X-80000 ^{a)}	80000	1/8" ¹⁾ 3mm ¹⁾	9782 9812	1/16" 3/32"	9802 9792	.10	6	3/16	1/8"	0.7	6.73	76	2.7
Straight Grinder													
DB710-X-70000*	70000	3mm	77882	1/8"	77872	.10	10	1/4	^{a)}	0.8	7	77	<2.5
DB700-T-37000*	37000	6 - 6.4mm	77862	-	-	.29	18	3/8	1/4"	1.2	6.81	84	5.2
D711-T-20000	20000	6 - 6.4mm	8482	-	-	.37	20	3/8	1/4"	1.3	8.50	77	3.4
J7115-T-24000	24000	6mm	354603 ⁷⁾	1/4"	354623 ⁷⁾	.67	44	1/2	1/4"	2.0	8.66	79	<2.5
J7115-T-19000	19000	6mm	354603 ⁷⁾	8mm	354613	.67	39	1/2	1/4"	2.0	8.66	76	<2.5
J7115-T-15000	15000	6mm	354603 ⁷⁾	8mm	354613	.67	34	1/2	1/4"	2.0	8.66	73	<2.5
L7115-T-22000	22000	6mm	354603 ⁷⁾	1/4"	354623 ⁷⁾	.94	47	1/2	1/4"	2.0	8.66	80	<2.5
L7115-T-15000	15000	6mm	354603 ⁷⁾	8mm	354613	.94	41	1/2	1/4"	2.0	8.66	75	<2.5
L7115-T-12000	12000	6mm	354603 ⁷⁾	8mm	354613	.94	40	1/2	1/4"	2.0	8.66	74	<2.5
L7116-T-24000	24000	6mm	354603 ⁷⁾	1/4"	354623 ⁷⁾	.67	45	1/2	1/4"	3.5	12.44	78	<2.5
L7116-T-15000	15000	6mm	354603 ⁷⁾	8mm	354613	.67	34	1/2	1/4"	3.5	12.44	73	<2.5
L7116-T-22000	22000	6mm	354603 ⁷⁾	1/4"	354623 ⁷⁾	.94	51	1/2	1/4"	3.5	12.44	80	<2.5
L7116-T-19000	19000	6mm	354603 ⁷⁾	8mm	354613	.94	47	1/2	1/4"	3.5	12.44	77	<2.5
L7116-T-15000	15000	6mm	354603 ⁷⁾	8mm	354613	.94	41	1/2	1/4"	3.5	12.44	76	<2.5
L7116-T-12000	12000	6mm	354603 ⁷⁾	8mm	354613	.94	40	1/2	1/4"	3.5	12.44	73	<2.5
Angle Grinder													
AS147-X-80000*	80000	1/8"	38932	3mm	38942	.08	8	3/16	1/8"	0.22	6.5	83	4.7
Wheel Grinder													
Tool Type	Free Speed rpm	Drive Output Spindle	Wheel Size		Motor Power H.P.	Air Flow cfm	Min. Hose Bore ins.	Air Inlet NPT	Weight lbs.	Length ins.	Sound Level dB(A)	Vibration Level ms ⁻²	
L7126-T-15000	15000	3/8" shaft	3		.94	41	1/2	1/4"	3.6	13.39	77	<2.5	
L7126-T-12000	12000	1/2" shaft	3 ^{a)}		.94	40	1/2	1/4"	3.6	13.39	75	<2.5	

¹⁾ Specify collet size when ordering.

²⁾ Supplied with 6 ft. supply hose and exhaust overhose fitted.

³⁾ Collet integral with drive spindle.

⁴⁾ 05 Grinder can be supplied separately or as a boxed kit containing a selection of popular mounted points. Please specify when ordering.

⁵⁾ Also available with 4" dia. grinding wheel. Specify conversion kit Part No. 93182.

⁶⁾ L & J Series grinders are supplied with exhaust overhose.

⁷⁾ Collet and nut assembly.

*Desoutter Limited ISO 9001 registration does not apply.

Kit for 05 with 3mm collet

Includes mounted points - Part No's 38562, 38542, 38522, 38582, 38602, 38632. Hose 2m long - Part No. 75902.

Kit for 05 with 1/8" collet

Includes mounted points - Part No's 5112, 5132, 5192, 5282, 5322, 5432. Hose 2m long - Part No. 75902. Dressing stone - Part No. 25602.